## SIEMENS

## Data sheet

## 3RT2025-1BW40



power contactor, AC-3 17 A, 7.5 kW / 400 V 1 NO + 1 NC, 48 V DC, 3-pole, Size S0 screw terminal

product brand name	SIRIUS
product designation	Power contactor
product designation	3RT2
General technical data	
size of contactor	S0
	50
product extension	No
function module for communication	No
auxiliary switch	Yes
power loss [W] for rated value of the current	1.8 W
at AC in hot operating state	
at AC in hot operating state per pole	0.6 W
without load current share typical	5.9 W
insulation voltage	600 \/
<ul> <li>of main circuit with degree of pollution 3 rated value</li> <li>of auxiliary circuit with degree of pollution 3 rated</li> </ul>	690 V 690 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	090 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	6 kV
<ul> <li>of auxiliary circuit rated value</li> </ul>	6 kV
maximum permissible voltage for safe isolation between	400 V
coil and main contacts according to EN 60947-1	
shock resistance at rectangular impulse	
• at DC	10g / 5 ms, 7,5g / 10 ms
shock resistance with sine pulse	
• at DC	15g / 5 ms, 10g / 10 ms
mechanical service life (switching cycles)	
<ul> <li>of contactor typical</li> </ul>	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
<ul> <li>at AC-3e rated value maximum</li> </ul>	690 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated value	40 A
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	40 A
— up to 690 V at ambient temperature 60 °C rated value	35 A
• at AC-3	
— at 400 V rated value	17 A
— at 500 V rated value	17 A
— at 690 V rated value	13 A
• at AC-3e	
— at 400 V rated value	17 A
— at 500 V rated value	17 A
— at 690 V rated value	13 A
• at AC-4 at 400 V rated value	15.5 A
• at AC-5a up to 690 V rated value	35.2 A
• at AC-5b up to 400 V rated value	14.1 A
• at AC-6a	
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	11.4 A
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	11.4 A
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	11.4 A
<ul> <li>— up to 690 V for current peak value n=20 rated value</li> </ul>	11.3 A
<ul> <li>at AC-6a         <ul> <li>up to 230 V for current peak value n=30 rated</li> <li>value</li> </ul> </li> </ul>	7.6 A
value — up to 400 V for current peak value n=30 rated value	7.6 A
— up to 500 V for current peak value n=30 rated value	7.6 A
<ul> <li>up to 690 V for current peak value n=30 rated value</li> </ul>	7.6 A
minimum cross-section in main circuit at maximum AC-1 rated value	10 mm <sup>2</sup>
operational current for approx. 200000 operating cycles at AC-4	
at 400 V rated value	7.7 A
• at 690 V rated value	7.7 A
operational current	
<ul> <li>at 1 current path at DC-1</li> </ul>	
— at 24 V rated value	35 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
<ul> <li>with 2 current paths in series at DC-1</li> </ul>	
— at 24 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	5 A
— at 440 V rated value	1A
— at 600 V rated value	0.8 A
• with 3 current paths in series at DC-1	
• with 5 current paths in series at DC-1	

— at 24 V rated value	35 A			
— at 110 V rated value	35 A			
— at 220 V rated value	35 A			
— at 440 V rated value	2.9 A			
— at 600 V rated value	1.4 A			
<ul> <li>at 1 current path at DC-3 at DC-5</li> </ul>				
— at 24 V rated value	20 A			
— at 110 V rated value	2.5 A			
— at 220 V rated value	1 A			
— at 440 V rated value	0.09 A			
— at 600 V rated value	0.06 A			
<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>				
— at 24 V rated value	35 A			
— at 110 V rated value	15 A			
— at 220 V rated value	3 A			
— at 440 V rated value	0.27 A			
— at 600 V rated value	0.16 A			
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>				
— at 24 V rated value	35 A			
— at 110 V rated value	35 A			
— at 220 V rated value	10 A			
— at 440 V rated value	0.6 A			
— at 600 V rated value	0.6 A			
operating power				
• at AC-3				
— at 230 V rated value	4 kW			
— at 400 V rated value	7.5 kW			
— at 500 V rated value	7.5 kW			
— at 690 V rated value	11 kW			
• at AC-3e				
— at 230 V rated value	4 kW			
— at 400 V rated value	4.5 kW			
— at 500 V rated value	7.5 kW			
— at 690 V rated value	11 kW			
operating power for approx. 200000 operating cycles				
at AC-4				
<ul> <li>at 400 V rated value</li> </ul>	3.5 kW			
at 690 V rated value	6 kW			
operating apparent power at AC-6a				
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	4.5 kVA			
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	7.8 kVA			
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	9.9 kVA			
up to 690 V for current peak value n=20 rated value	13.6 kVA			
operating apparent power at AC-6a				
<ul> <li>up to 230 V for current peak value n=30 rated value</li> </ul>	3 kVA			
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	5.2 kVA			
<ul> <li>up to 500 V for current peak value n=30 rated value</li> </ul>	6.6 kVA			
<ul> <li>up to 690 V for current peak value n=30 rated value</li> </ul>	9.1 kVA			
short-time withstand current in cold operating state up to 40 °C				
<ul> <li>limited to 1 s switching at zero current maximum</li> </ul>	225 A; Use minimum cross-section acc. to AC-1 rated value			
<ul> <li>limited to 5 s switching at zero current maximum</li> </ul>	225 A; Use minimum cross-section acc. to AC-1 rated value			
<ul> <li>limited to 10 s switching at zero current maximum</li> </ul>	180 A; Use minimum cross-section acc. to AC-1 rated value			
<ul> <li>limited to 30 s switching at zero current maximum</li> </ul>	115 A; Use minimum cross-section acc. to AC-1 rated value			
<ul> <li>limited to 60 s switching at zero current maximum</li> </ul>	96 A; Use minimum cross-section acc. to AC-1 rated value			
no-load switching frequency				
● at DC	1 500 1/h			
operating frequency				
<ul> <li>at AC-1 maximum</li> </ul>	1 000 1/h			
• at AC-2 maximum	1 000 1/h			
at AC-3 maximum	1 000 1/h			

• at AC-3e maximum	1 000 1/h
• at AC-3 maximum • at AC-4 maximum	300 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC	
rated value	48 V
operating range factor control supply voltage rated	
value of magnet coil at DC	
• initial value	0.8
• full-scale value	1.1
closing power of magnet coil at DC	5.9 W
holding power of magnet coil at DC	5.9 W
closing delay	
• at DC	50 170 ms
opening delay	
• at DC	15 17.5 ms
arcing time	10 10 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
number of NO contacts for auxiliary contacts	1
instantaneous contact	
operational current at AC-12 maximum	10 A
operational current at AC-15	
<ul> <li>at 230 V rated value</li> </ul>	10 A
<ul> <li>at 400 V rated value</li> </ul>	3 A
<ul> <li>at 500 V rated value</li> </ul>	2 A
<ul> <li>at 690 V rated value</li> </ul>	1 A
operational current at DC-12	
<ul> <li>at 24 V rated value</li> </ul>	10 A
<ul> <li>at 48 V rated value</li> </ul>	6 A
• at 60 V rated value	6 A
<ul> <li>at 110 V rated value</li> </ul>	3 A
• at 125 V rated value	2 A
• at 220 V rated value	1 A
at 600 V rated value	0.15 A
operational current at DC-13	
• at 24 V rated value	10 A
• at 48 V rated value	2 A
at 60 V rated value	2 A
at 110 V rated value	1 A
at 125 V rated value	0.9 A
at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value	14 A
at 480 V rated value     at 600 V rated value	14 A 17 A
vielded mechanical performance [hp]	
for single-phase AC motor	
<ul> <li>Ior single-phase AC motor</li> <li>— at 110/120 V rated value</li> </ul>	1 hp
— at 230 V rated value	3 hp
for 3-phase AC motor	
- at 200/208 V rated value	3 hp
— at 220/200 V rated value	5 hp
— at 220/230 V rated value	10 hp
— at 575/600 V rated value	15 hp
contact rating of auxiliary contacts according to UL	A600 / P600
contact rating of auxiliary contacts according to OL	100071000

hort-circuit protection				
design of the fuse link				
<ul> <li>for short-circuit protection of the main circuit</li> </ul>				
- with type of coordination 1 required	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA			
<ul> <li>— with type of assignment 2 required</li> </ul>	gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA			
<ul> <li>for short-circuit protection of the auxiliary switch</li> </ul>	gG: 10 A (500 V, 1 kA)			
required				
nstallation/ mounting/ dimensions				
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface			
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail			
•	according to DIN EN 60715			
<ul> <li>side-by-side mounting</li> </ul>	Yes			
height	85 mm			
width	45 mm			
depth	107 mm			
required spacing				
<ul> <li>with side-by-side mounting</li> </ul>				
— forwards	10 mm			
— upwards	10 mm			
— downwards	10 mm			
— at the side	0 mm			
<ul> <li>for grounded parts</li> </ul>				
— forwards	10 mm			
— upwards	10 mm			
— at the side	6 mm			
— downwards	10 mm			
for live parts				
— forwards	10 mm			
— upwards	10 mm			
— downwards	10 mm			
— at the side	6 mm			
connections/ Terminals				
type of electrical connection				
for main current circuit	screw-type terminals			
for auxiliary and control circuit	screw-type terminals			
-	Screw-type terminals			
at contactor for auxiliary contacts	Screw-type terminals			
of magnet coil     type of connectable conductor cross sections				
type of connectable conductor cross-sections				
for main contacts	$2y/4 = 2Emm^2 + 2y/(2E = 40mm^2)$			
— solid	2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> )			
— solid or stranded	2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> )			
— finely stranded with core end processing	2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>			
at AWG cables for main contacts	2x (16 12), 2x (14 8)			
connectable conductor cross-section for main contacts				
• solid	1 10 mm²			
• stranded	1 10 mm²			
<ul> <li>finely stranded with core end processing</li> </ul>	1 10 mm²			
connectable conductor cross-section for auxiliary contacts				
solid or stranded	0.5 2.5 mm²			
	0.5 2.5 mm <sup>2</sup>			
<ul> <li>finely stranded with core end processing</li> </ul>	0.0 2.0 IIIII			
type of connectable conductor cross sections				
for auxiliary contacts				
— solid or stranded	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )			
<ul> <li>for auxiliary contacts</li> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)			
<ul> <li>for auxiliary contacts</li> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> <li>at AWG cables for auxiliary contacts</li> </ul>				
<ul> <li>for auxiliary contacts</li> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)			

<ul> <li>for auxiliary co</li> </ul>	ontacts		20 14			
Safety related data						
product function						
<ul> <li>mirror contact</li> </ul>	<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>		Yes			
B10 value with high demand rate according to SN 31920		450 000				
proportion of dang	erous failures					
<ul> <li>with low dema</li> </ul>	and rate according to SN	31920	40 %			
-	and rate according to SN		73 %			
failure rate [FIT] with low demand rate according to SN 31920		100 FIT				
T1 value for proof te IEC 61508	est interval or service life a	according to	20 у			
60529	on the front according		IP20			
	n the front according to	IEC 60529	finger-safe, for vertica	I contact from the front		
<ul><li>suitability for use</li><li>safety-related</li></ul>	switching OFF		Yes			
Certificates/ approva	als					
General Product A	pproval					
		<u>Confirmatic</u>		<u>KC</u>	EHC	
EMC	Functional Safety/Safety of Machinery	Declaration o	f Conformity	Test Certificates		
RCM	<u>Type Examination</u> <u>Certificate</u>	UK CA	CE EG-Konf.	Special Test Certific- ate	<u>Type Test Certific-</u> ates/Test Report	
Marine / Shipping						
ABS	BUREAU VERITAS		Llovd's Register us	RINA	RMRS	
other			Dangerous Ge	ood		
Confirmation	Environmental Con- firmations		<u>Transport Infor</u> tion	ma-		
Further information Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2025-1BW40						


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2025-1BW40

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RT2025-1BW40

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2025-1BW40&lang=en

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

## https://support.industry.siemens.com/cs/ww/en/ps/3RT2025-1BW40/char Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2025-1BW40&objecttype=14&gridview=view1

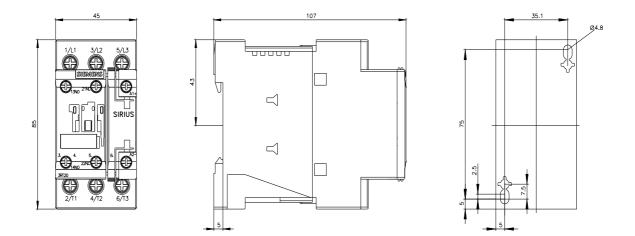

last modified:

6/2/2022 🖸