


Data Sheet

Tag-it™ HF Transponder Inlay Rectangle - Miniature

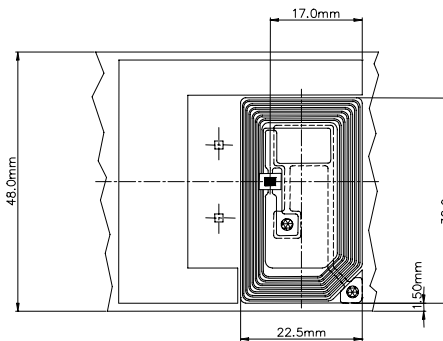

Specifications:

Part Number	RI-I03-110A
Recommended Operating frequency	13.56 MHz
Passive Resonance Frequency (at +25°C)	14.26 MHz ± 400kHz (includes frequency offset to compensate further integration into PVC; drops down to operating frequency when exposed to activation field strength)
Typical activation field strength read (at +25°C)	112 dBμA/m (preliminary value)
Typical activation field strength write (at +25°C)	116 dBμA/m (preliminary value)
Factory programmed Read Only Number	32 bits
Memory (user programmable)	256 bits organized in 8 x 32-bit blocks
Typical programming cycles (at +25°C)	100,000
Data retention time (at +55°C)	> 10 years
Simultaneous Identification of Tags	Up to 50 tags per second (reader/antenna dependant)
Uplink / downlink data rates	26.7 kBd / 6.2 and 9 kBd
RX modulation	Pulse-width coded, AM 100% modulation
TX frequencies	Manchester encoded, A = $f_c \pm 423.75$ kHz, B = $f_c \pm 484.29$ kHz Low bit: transition A to B. High bit: transition B to A
Antenna size	22.5 mm x 38 mm (~0.89 x ~1.5 in)
Foil width	48 mm ± 0.5 mm (1.89 in ± 0.02 in)
Foil pitch	48 mm +0.1mm/-0.4mm (~1.89 in)
Thickness	Chip: 0.355mm (~0.014 in) Antenna: 0.085mm (~0.0033 in)
Base material	Substrate: PET (Polyethylenetherephtalate) Antenna: Aluminum
Smallest bending radius allowed	18 mm (~0.71 in)
Operating temperature	-25°C to +70°C
Storage temperature (single inlay)	-40°C to +85°C (warpage may occur with increasing temperature)
Storage temperature (on reel)	-40°C to +40°C
Delivery	Single row tape wound on cardboard reel with 500 mm diameter Reel width: approx. 60 mm (~2.36 in); inside 50 mm (~1.97 in) Hub diameter: 76.2 mm (3 in)
Typical quantity per reel	5,000

For more information, contact the sales office or distributor nearest you. This contact information can be found on our web site at: <http://www.ti-rfid.com>

Texas Instruments reserves the right to change its products and services at any time without notice. TI provides customer assistance in various technical areas, but does not have full access to data concerning the uses and applications of customers products. Therefore, TI assumes no responsibility for customer product design or for infringement of patents and/or the rights of third parties, which may result from assistance provided by TI.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2009, Texas Instruments Incorporated