## SIEMENS

## Data sheet

## 3RT2016-1AB02



Power contactor, AC-3 9 A, 4 kW / 400 V 1 NC, 24 V AC, 50 / 60 Hz 3-pole, Size S00 screw terminal

product brand name	SIRIUS				
product designation	SIRIUS Power contactor				
product designation	3RT2				
General technical data	SIVIZ				
	200				
size of contactor	S00				
product extension					
function module for communication	No				
auxiliary switch	Yes				
power loss [W] for rated value of the current					
at AC in hot operating state	0.9 W				
<ul> <li>at AC in hot operating state per pole</li> </ul>	0.3 W				
without load current share typical	4.2 W				
insulation voltage					
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V				
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V				
surge voltage resistance					
<ul> <li>of main circuit rated value</li> </ul>	6 kV				
<ul> <li>of auxiliary circuit rated value</li> </ul>	6 kV				
maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1	400 V				
shock resistance at rectangular impulse					
• at AC	6,7g / 5 ms, 4,2g / 10 ms				
shock resistance with sine pulse					
• at AC	10,5g / 5 ms, 6,6g / 10 ms				
mechanical service life (switching cycles)					
<ul> <li>of contactor typical</li> </ul>	30 000 000				
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000				
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000				
reference code according to IEC 81346-2	Q				
Substance Prohibitance (Date)	10/01/2009				
Ambient conditions					
installation altitude at height above sea level maximum	2 000 m				
ambient temperature					
<ul> <li>during operation</li> </ul>	-25 +60 °C				
during storage	-55 +80 °C				
relative humidity minimum	10 %				
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %				

Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
<ul> <li>at AC-3e rated value maximum</li> </ul>	690 V
operational current	
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated value</li> </ul>	22 A
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	22 A
— up to 690 V at ambient temperature 60 °C rated value	20 A
• at AC-3	
— at 400 V rated value	9 A
— at 500 V rated value	7.7 A
— at 690 V rated value	6.7 A
● at AC-3e	
— at 400 V rated value	9 A
— at 500 V rated value	7.7 A
— at 690 V rated value	6.7 A
• at AC-4 at 400 V rated value	8.5 A
<ul> <li>at AC-5a up to 690 V rated value</li> </ul>	19.4 A
• at AC-5b up to 400 V rated value	7.4 A
• at AC-6a	
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	5.3 A
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	5.3 A
— up to 500 V for current peak value n=20 rated value	5.3 A
<ul> <li>up to 690 V for current peak value n=20 rated value</li> </ul>	5 A
<ul> <li>at AC-6a         <ul> <li>up to 230 V for current peak value n=30 rated value</li> </ul> </li> </ul>	3.5 A
<ul> <li>— up to 400 V for current peak value n=30 rated value</li> </ul>	3.5 A
<ul> <li>— up to 500 V for current peak value n=30 rated value</li> </ul>	3.6 A
— up to 690 V for current peak value n=30 rated value	3.3 A
minimum cross-section in main circuit at maximum AC-1 rated value operational current for approx. 200000 operating	4 mm <sup>2</sup>
cycles at AC-4	
at 400 V rated value	4.1 A
• at 690 V rated value	3.3 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	20 A
— at 110 V rated value	2.1 A
— at 220 V rated value	0.8 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
with 2 current paths in series at DC-1	
- at 24 V rated value	20 A
	20 A 12 A
— at 110 V rated value	
— at 220 V rated value	1.6 A
— at 440 V rated value	0.8 A
— at 600 V rated value	0.7 A
<ul> <li>with 3 current paths in series at DC-1</li> </ul>	

— at 24 V rated value	20 A				
— at 110 V rated value	20 A				
— at 220 V rated value	20 A				
— at 440 V rated value	1.3 A				
— at 600 V rated value	1 A				
<ul> <li>at 1 current path at DC-3 at DC-5</li> </ul>					
— at 24 V rated value	20 A				
— at 110 V rated value	0.1 A				
<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>					
— at 24 V rated value	20 A				
— at 110 V rated value	0.35 A				
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>					
— at 24 V rated value	20 A				
— at 110 V rated value	20 A				
— at 220 V rated value	1.5 A				
— at 440 V rated value	0.2 A				
— at 600 V rated value	0.2 A				
operating power	-				
• at AC-3					
— at 230 V rated value	2.2 kW				
— at 400 V rated value	4 kW				
— at 500 V rated value	4 kW				
— at 690 V rated value	5.5 kW				
• at AC-3e					
— at 230 V rated value	2.2 kW				
— at 400 V rated value	4 kW				
— at 500 V rated value	4 kW				
— at 690 V rated value	5 kW				
operating power for approx. 200000 operating cycles	-				
at AC-4					
<ul> <li>at 400 V rated value</li> </ul>	2 kW				
• at 690 V rated value	2.5 kW				
operating apparent power at AC-6a					
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	2 kVA				
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	3.6 kVA				
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	4.6 kVA				
<ul> <li>up to 690 V for current peak value n=20 rated value</li> </ul>	5.9 kVA				
operating apparent power at AC-6a					
<ul> <li>up to 230 V for current peak value n=30 rated value</li> </ul>	1.3 kVA				
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	2.4 kVA				
<ul> <li>up to 500 V for current peak value n=30 rated value</li> </ul>	3.1 kVA				
<ul> <li>up to 690 V for current peak value n=30 rated value</li> </ul>	4 kVA				
short-time withstand current in cold operating state up to 40 °C					
<ul> <li>limited to 1 s switching at zero current maximum</li> </ul>	155 A; Use minimum cross-section acc. to AC-1 rated value				
<ul> <li>limited to 5 s switching at zero current maximum</li> </ul>	111 A; Use minimum cross-section acc. to AC-1 rated value				
<ul> <li>limited to 10 s switching at zero current maximum</li> </ul>	86 A; Use minimum cross-section acc. to AC-1 rated value				
<ul> <li>limited to 30 s switching at zero current maximum</li> </ul>	66 A; Use minimum cross-section acc. to AC-1 rated value				
Imited to 60 s switching at zero current maximum	55 A; Use minimum cross-section acc. to AC-1 rated value				
no-load switching frequency					
• at AC	10 000 1/h				
operating frequency					
<ul> <li>at AC-1 maximum</li> </ul>	1 000 1/h				
<ul> <li>at AC-2 maximum</li> </ul>	750 1/h				
• at AC-3 maximum	750 1/h				
at AC-3e maximum	750 1/h				
• at AC-4 maximum	250 1/h				
Control circuit/ Control					
type of voltage of the control supply voltage	AC				
control supply voltage at AC					

• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
operating range factor control supply voltage rated	
value of magnet coil at AC	0.0 4.4
• at 50 Hz	0.8 1.1 0.85 1.1
• at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	27.1/4
• at 50 Hz	27 VA
• at 60 Hz	24.3 VA
inductive power factor with closing power of the coil	0.0
• at 50 Hz	0.8
• at 60 Hz	0.75
apparent holding power of magnet coil at AC	4.03/4
• at 50 Hz	4.2 VA
• at 60 Hz	3.3 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.25
• at 60 Hz	0.25
closing delay	
• at AC	9 35 ms
opening delay	
• at AC	7 13 ms
arcing time	10 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts	1
instantaneous contact	
operational current at AC-12 maximum	10 A
operational current at AC-15	
<ul> <li>at 230 V rated value</li> </ul>	10 A
<ul> <li>at 400 V rated value</li> </ul>	3 A
<ul> <li>at 500 V rated value</li> </ul>	2 A
at 690 V rated value	1 A
operational current at DC-12	
<ul> <li>at 24 V rated value</li> </ul>	10 A
<ul> <li>at 48 V rated value</li> </ul>	6 A
<ul> <li>at 60 V rated value</li> </ul>	6 A
<ul> <li>at 110 V rated value</li> </ul>	3 A
<ul> <li>at 125 V rated value</li> </ul>	2 A
<ul> <li>at 220 V rated value</li> </ul>	1 A
• at 600 V rated value	0.15 A
operational current at DC-13	
• at 24 V rated value	10 A
• at 48 V rated value	2 A
• at 60 V rated value	2 A
<ul> <li>at 110 V rated value</li> </ul>	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
• at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	7.6 A
• at 600 V rated value	9 A
yielded mechanical performance [hp]	
<ul> <li>for single-phase AC motor</li> </ul>	
— at 110/120 V rated value	0.33 hp
— at 230 V rated value	1 hp
<ul> <li>for 3-phase AC motor</li> </ul>	
— at 200/208 V rated value	2 hp

at 220/220 V rated value	3 hn				
- at 220/230 V rated value	3 hp				
- at 460/480 V rated value	5 hp				
at 575/600 V rated value contact rating of auxiliary contacts according to UL	7.5 hp A600 / Q600				
	A600 / Q600				
Short-circuit protection					
design of the fuse link					
<ul> <li>for short-circuit protection of the main circuit</li> </ul>	~C: 254 (600)/ 100k4), cM: 204 (600)/ 100k4), DS89: 254 (415)/ 80k4)				
<ul> <li>— with type of coordination 1 required</li> <li>— with type of assignment 2 required</li> </ul>	gG: 35A (690V,100kA), aM: 20A (690V,100kA), BS88: 35A (415V,80kA)				
— with type of assignment 2 required	gG: 20A (690V,100kA), aM: 16A (690V, 100kA), BS88: 20A (415V, 80kA)				
<ul> <li>for short-circuit protection of the auxiliary switch</li> </ul>	gG: 10 A (500 V, 1 kA)				
required	· · · · /				
Installation/ mounting/ dimensions					
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface				
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715				
side-by-side mounting	Yes				
height	58 mm				
width	45 mm				
depth	73 mm				
required spacing					
with side-by-side mounting					
— forwards	10 mm				
— upwards	10 mm				
— downwards	10 mm				
— at the side	0 mm				
for grounded parts					
— forwards	10 mm				
— upwards	10 mm				
— at the side	6 mm				
— downwards	10 mm				
for live parts	10				
— forwards	10 mm				
— upwards	10 mm				
- downwards	10 mm				
— at the side	6 mm				
Connections/ Terminals					
type of electrical connection					
for main current circuit	screw-type terminals				
<ul> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals				
at contactor for auxiliary contacts	Screw-type terminals				
of magnet coil	Screw-type terminals				
type of connectable conductor cross-sections					
for main contacts	$2x (0.5 - 1.5 mm^2) 2x (0.75 - 0.5 mm^2) 2x 4 mm^2$				
— solid	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>				
<ul> <li>— solid or stranded</li> <li>finally stranded with core and processing</li> </ul>	2x (0,5 1,5 mm <sup>2</sup> ), 2x (0,75 2,5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>				
<ul> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul>	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )				
connectable conductor cross-section for main	2x (20 16), 2x (18 14), 2x 12				
contacts	0.5 4 mm²				
• solid	0.5 4 mm <sup>2</sup>				
<ul> <li>stranded</li> <li>finally stranded with core and processing</li> </ul>	0.5 4 mm <sup>2</sup>				
finely stranded with core end processing	0.5 2.5 mm²				
connectable conductor cross-section for auxiliary contacts					
<ul> <li>solid or stranded</li> </ul>	0.5 4 mm²				
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm²				
type of connectable conductor cross-sections					
<ul> <li>for auxiliary contacts</li> </ul>					
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²				

-	nded with core end proc for auxiliary contacts					
	led connectable cond	uctor cross				
<ul> <li>section</li> <li>for main contact</li> </ul>	te		20 12			
<ul> <li>for auxiliary con</li> </ul>			20 12			
Safety related data			20 12			
product function						
	eccording to IEC 60947-	4-1	Yes			
	emand rate according t		1 000 000			
proportion of dange						
<ul> <li>with low deman</li> </ul>	d rate according to SN	31920	40 %			
<ul> <li>with high deman</li> </ul>	nd rate according to SN	31920	73 %			
31920	ow demand rate accord		100 FIT			
IEC 61508	t interval or service life		20 y			
60529	on the front according		IP20			
	the front according to	IEC 60529	finger-safe, for v	ertical conta	act from the front	
suitability for use			Vee			
<ul> <li>safety-related s</li> <li>Certificates/ approval</li> </ul>	-		Yes			
		_	_	_	_	
General Product Ap	proval					
(SP)		<u>Confirmatio</u>		D	KC	EHC
EMC	Functional Safety/Safety of Machinery	Declaration of	of Conformity		Test Certificates	
RCM	<u>Type Examination</u> <u>Certificate</u>		C EG-I	E Konf.	Type Test Certific- ates/Test Report	<u>Special Test Certific-</u> <u>ate</u>
Marine / Shipping						
ABS	BUREAU			vds ister is	PRS	RINA
Marine / Shipping	other					
RMES	<u>Confirmation</u>	DE	<u>Confir</u>	<u>mation</u>		
Further information Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2016-1AB02 Cax online generator						

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2016-1AB02

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2016-1AB02


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2016-1AB02&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2016-1AB02/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2016-1AB02&objecttype=14&gridview=view1







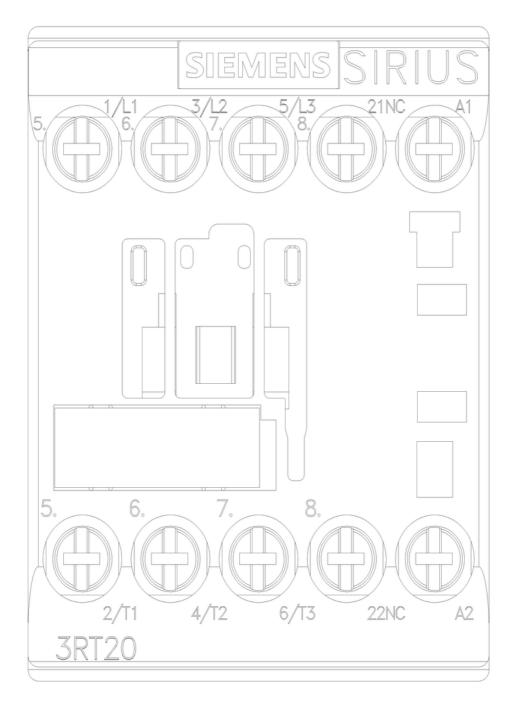

last modified:

