## SIEMENS

## Data sheet

## 3RH2131-1AU60




Contactor relay, 3 NO+1 NC 277 V AC, 60 Hz Size S00, screw terminal


nunduné bunna nama	
product brand name	SIRIUS
product designation	Auxiliary contactor 3RH2
product type designation	JKHZ
General technical data	
size of contactor	S00
product extension auxiliary switch	Yes
insulation voltage with degree of pollution 3 at AC rated value	690 V
degree of pollution	3
surge voltage resistance rated value	6 kV
shock resistance at rectangular impulse	
• at AC	7,3g / 5 ms, 4,7g / 10 ms
shock resistance with sine pulse	
● at AC	11,4g / 5 ms, 7,3g / 10 ms
mechanical service life (switching cycles)	
<ul> <li>of contactor typical</li> </ul>	30 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	К
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
no-load switching frequency	
• at AC	10 000 1/h
• at DC	10 000 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 60 Hz rated value	277 V
control supply voltage frequency	
• 2 rated value	60 Hz


operating range factor control supply voltage rated	
value of magnet coil at AC • at 60 Hz	0.851.1
apparent pick-up power of magnet coil at AC	37 VA
inductive power factor with closing power of the coil	0.8
apparent holding power of magnet coil at AC	_ 0.0 5.7 VA
inductive power factor with the holding power of the	0.25
coil	0.20
closing delay	
• at AC	8 33 ms
opening delay	
• at AC	4 15 ms
arcing time	10 15 ms
Auxiliary circuit	
number of NC contacts for auxiliary contacts	1
<ul> <li>instantaneous contact</li> </ul>	1
number of NO contacts for auxiliary contacts	3
instantaneous contact	3
identification number and letter for switching elements	31 E
operational current at AC-12 maximum	10 A
operational current at AC-15	
• at 230 V rated value	10 A
<ul> <li>at 400 V rated value</li> </ul>	3 A
• at 500 V rated value	2 A
• at 690 V rated value	1 A
operational current at 1 current path at DC-12	
<ul> <li>at 24 V rated value</li> </ul>	10 A
<ul> <li>at 110 V rated value</li> </ul>	3 A
<ul> <li>at 220 V rated value</li> </ul>	1 A
<ul> <li>at 440 V rated value</li> </ul>	0.3 A
at 600 V rated value	0.15 A
operational current with 2 current paths in series at DC-12	
<ul> <li>at 24 V rated value</li> </ul>	10 A
• at 60 V rated value	10 A
• at 110 V rated value	4 A
• at 220 V rated value	2 A
• at 440 V rated value	1.3 A
• at 600 V rated value	0.65 A
operational current with 3 current paths in series at DC-12	
• at 24 V rated value	10 A
• at 60 V rated value	10 A
• at 110 V rated value	10 A
<ul> <li>at 220 V rated value</li> </ul>	3.6 A
• at 440 V rated value	2.5 A
• at 600 V rated value	1.8 A
operating frequency at DC-12 maximum	1 000 1/h
operational current at 1 current path at DC-13	
• at 24 V rated value	10 A
• at 110 V rated value	1 A
• at 220 V rated value	0.3 A
• at 440 V rated value	0.14 A
at 600 V rated value	0.1 A
operational current with 2 current paths in series at DC-13	
at 24 V rated value	10 A
• at 60 V rated value	3.5 A
• at 110 V rated value	1.3 A
• at 220 V rated value	0.9 A


at 440 V rated value	0.2 A
at 600 V rated value	0.1 A
operational current with 3 current paths in series at DC-13	
at 24 V rated value	10 A
at 60 V rated value	4.7 A
at 110 V rated value	3A
at 220 V rated value	1.2 A
	0.5 A
<ul> <li>at 440 V rated value</li> <li>at 600 V rated value</li> </ul>	0.26 A
	1 000 1/h
operating frequency at DC-13 maximum	
design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V	C characteristic: 6 A; 0.4 kA
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link for short-circuit protection of the	fuse gL/gG: 10 A
auxiliary switch required	
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail
height	57.5 mm
width	45 mm
depth	73 mm
required spacing	
<ul> <li>with side-by-side mounting</li> </ul>	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
<ul> <li>for grounded parts</li> </ul>	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
	scrow type terminals
type of electrical connection for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
for auxiliary contacts	$2x (0.5, 1.5, mm^2) 2x (0.75, 2.5, mm^2) 2x (1.75, 1.5) 2x (1.75$
— solid or stranded	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>
- finely stranded with core end processing	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )
at AWG cables for auxiliary contacts	2x (20 16), 2x (18 14), 2x 12
Safety related data	
B10 value with high demand rate according to SN 31920	1 000 000; With 0.3 x le
proportion of dangerous failures	
with low demand rate according to SN 31920	40 %
with high demand rate according to SN 31920	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 y
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

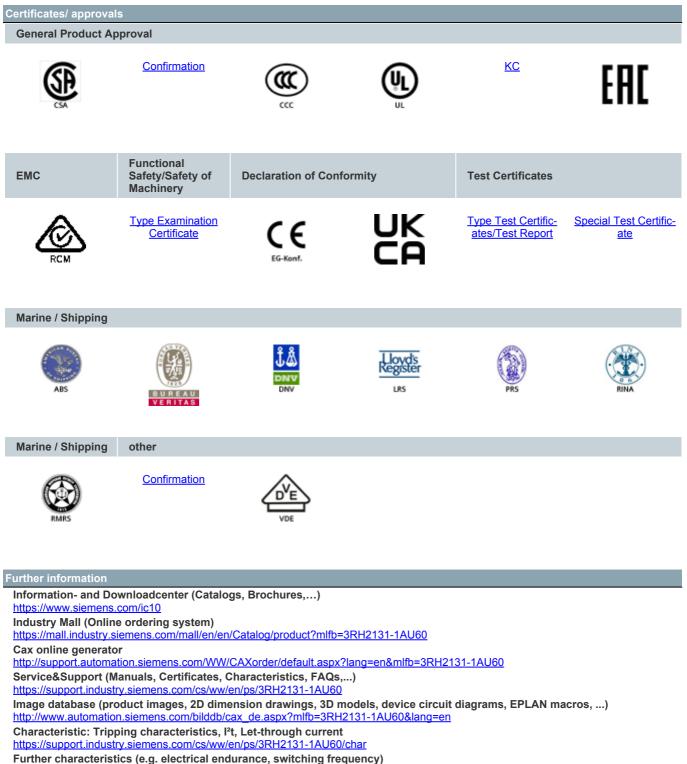


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RH2131-1AU60&objecttype=14&gridview=view1







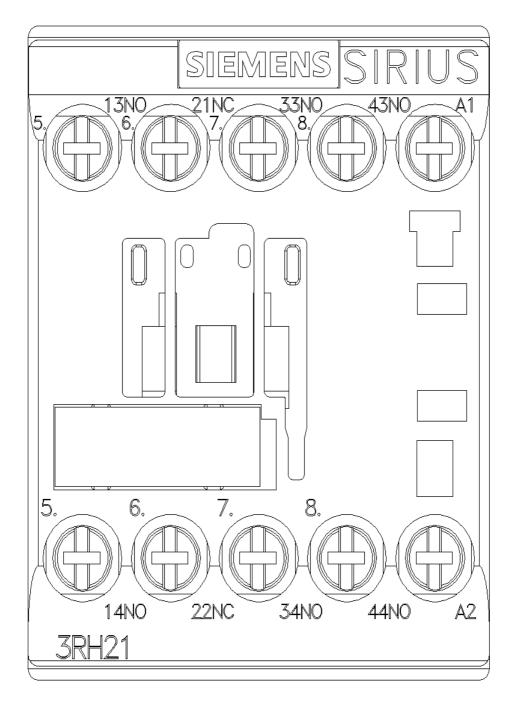

last modified:

12/1/2021 🖸