

## **Technical Data Sheet**


SP5T Terminated Ramses SMA 3GHz Latching Indicators 12Vdc Pins Terminals

	IARACTERISTIC				
1		<u>28</u>			
1			_		
	Number of ways		: 5		
Frequency range		: 0 - 3 GHz			
I	Impedance		: 50 Ohms		
F	Frequency (GHz	() DC - 3			
10	VSWR max	1.20			
Ī	Insertion loss ma	ax 0.20 dB			
	Isolation min	80 dB			
11-	Average power (				
		,			
	TERMINATION		: <b>50 Ohms</b>		
٦	TERM. AVG. PC	OWER AT 25° C	: 1 W per terr	nination / 3 W total power	
ELECT	RICAL CHARA	CTERISTICS			
Actuator					
Nominal current **		: 320 mA / RESET : 1600 mA ****			
Actuator voltage (Vcc) Terminals		: 12V (10.2 to 13V) / NEGATIVE COMMON : solder pins (250°C max. / 30 sec.)			
	Indicator rating		: 1 W / 30 V /		
MECH	ANICAL CHARA	CTERISTICS			
	Connectors		: SMA female per MIL-C 39012		
	Life		2 million cycles per position		
	Switching Time***		: < 15 ms		
	Construction		: Splashproo		
1	Weight		∶ < 250 g		
<u>ENVIR</u>	ONMENTAL CH	ARACTERISTICS			
	Operating tempe		: -40°C to +85		
	Storage tempera	ature range	∶ -55°C to +85	ROHS	
	Average power at 25°C per RF Path)				
			OMELLA		
	Nominal voltage			"THE LI	
(**** F	Reset : supply voltage time 1sec. max. / duty cycle 10%)				

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.



SP5T Terminated Ramses SMA 3GHz Latching Indicators 12Vdc Pins Terminals

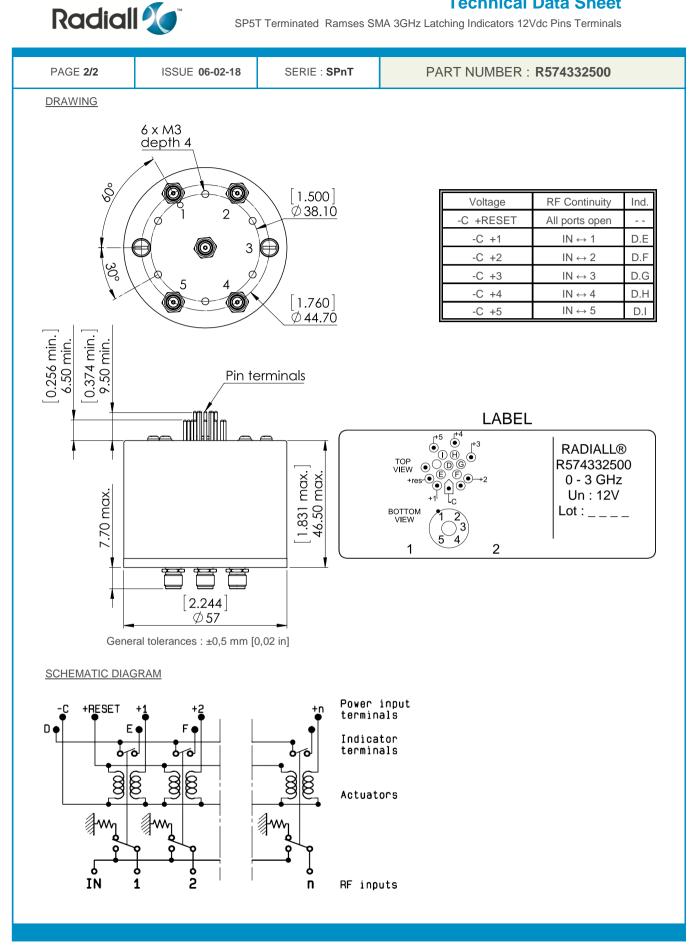

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.