3RT2017-1AP02-1AA0

Data sheet



Power contactor, AC-3 12 A, 5.5 kW / 400 V 1 NC, 230 V AC, 50 / 60 Hz 3-pole, Size S00 screw terminal upright mounting position

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S00
product extension	
function module for communication	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
at AC in hot operating state	1.5 W
 at AC in hot operating state per pole 	0.5 W
 without load current share typical 	5.7 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	7,3g / 5 ms, 4,7g / 10 ms
shock resistance with sine pulse	
• at AC	11,4g / 5 ms, 7,3g / 10 ms
mechanical service life (switching cycles)	
 of contactor typical 	30 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

lain circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operational current	
at AC-1 at 400 V at ambient temperature 40 °C rated value	22 A
• at AC-1	
 up to 690 V at ambient temperature 40 °C rated value 	22 A
— up to 690 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	20 A
• at AC-3	
— at 400 V rated value	12 A
— at 500 V rated value	9.2 A
— at 690 V rated value	6.7 A
• at AC-3e	
— at 400 V rated value	12 A
— at 500 V rated value	9.2 A
— at 690 V rated value	6.7 A
• at AC-4 at 400 V rated value	8.5 A
• at AC-5a up to 690 V rated value	19.4 A
at AC-5b up to 400 V rated value	9.9 A
• at AC-6a	
up to 230 V for current peak value n=20 rated value	7.2 A
 up to 400 V for current peak value n=20 rated value 	7.2 A
 up to 500 V for current peak value n=20 rated value 	7.2 A
— up to 690 V for current peak value n=20 rated value value	6.7 A
 at AC-6a up to 230 V for current peak value n=30 rated value 	4.8 A
— up to 400 V for current peak value n=30 rated value	4.8 A
 up to 500 V for current peak value n=30 rated value 	4.8 A
— up to 690 V for current peak value n=30 rated value	4.8 A
minimum cross-section in main circuit at maximum AC-1 rated value operational current for approx. 200000 operating	4 mm ²
cycles at AC-4	
at 400 V rated value	4.1 A
at 690 V rated value	3.3 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	20 A
— at 110 V rated value	2.1 A
— at 220 V rated value	0.8 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
with 2 current paths in series at DC-1	0.07.
— at 24 V rated value	20 A
	12 A
— at 110 V rated value	1.6 A
— at 220 V rated value	
— at 440 V rated value	0.8 A
— at 600 V rated value	0.7 A
 with 3 current paths in series at DC-1 	

— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	20 A
— at 440 V rated value	1.3 A
— at 600 V rated value	1 A
 at 1 current path at DC-3 at DC-5 	
— at 24 V rated value	20 A
— at 110 V rated value	0.1 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	20 A
— at 110 V rated value	0.35 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	1.5 A
— at 440 V rated value	0.2 A
— at 600 V rated value	0.2 A
operating power	
at AC-2 at 400 V rated value	5.5 kW
• at AC-3	
— at 230 V rated value	3 kW
— at 230 V rated value — at 400 V rated value	5.5 kW
— at 400 V rated value — at 500 V rated value	
	5.5 kW
— at 690 V rated value	5.5 kW
• at AC-3e	0.1114
— at 230 V rated value	3 kW
— at 400 V rated value	5.5 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	5.5 kW
operating power for approx. 200000 operating cycles at AC-4	
at 400 V rated value	2 kW
● at 690 V rated value	2.5 kW
operating apparent power at AC-6a	
 up to 230 V for current peak value n=20 rated value 	2.8 kVA
 up to 400 V for current peak value n=20 rated value 	4.9 kVA
 up to 500 V for current peak value n=20 rated value 	6.2 kVA
 up to 690 V for current peak value n=20 rated value 	8 kVA
operating apparent power at AC-6a	
• up to 230 V for current peak value n=30 rated value	1.9 kVA
• up to 400 V for current peak value n=30 rated value	3.3 kVA
up to 500 V for current peak value n=30 rated value	4.1 kVA
 up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 	5.7 kVA
short-time withstand current in cold operating state	
up to 40 °C	
 limited to 1 s switching at zero current maximum 	200 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 5 s switching at zero current maximum 	123 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 10 s switching at zero current maximum 	96 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 30 s switching at zero current maximum 	74 A; Use minimum cross-section acc. to AC-1 rated value
limited to 60 s switching at zero current maximum	61 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at AC	10 000 1/h
operating frequency	
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	750 1/h
• at AC-3e maximum	750 1/h
• at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
type of voltage of the control supply voltage	/ NO

control supply voltage at AC	
at 50 Hz rated value	230 V
at 60 Hz rated value	230 V
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.8 1.1
● at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	37 VA
● at 60 Hz	33 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.8
● at 60 Hz	0.75
apparent holding power of magnet coil at AC	
● at 50 Hz	5.7 VA
• at 60 Hz	4.4 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.25
• at 60 Hz	0.25
closing delay	
• at AC	9 35 ms
opening delay	
• at AC	7 13 ms
arcing time	10 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
•	10 A
 at 230 V rated value 	
at 230 V rated valueat 400 V rated value	3 A
• at 400 V rated value	3 A
at 400 V rated valueat 500 V rated value	3 A 2 A
at 400 V rated valueat 500 V rated valueat 690 V rated value	3 A 2 A
at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12	3 A 2 A 1 A
 at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value 	3 A 2 A 1 A
at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value	3 A 2 A 1 A 10 A 6 A
 at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value 	3 A 2 A 1 A 10 A 6 A 6 A
 at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value 	3 A 2 A 1 A 10 A 6 A 6 A 3 A
at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A
at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A
at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A
at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
 at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 24 V rated value operational current at DC-13 at 24 V rated value 	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 220 V rated value at 600 V rated value at 640 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
 at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 60 V rated value at 110 V rated value at 110 V rated value at 110 V rated value 	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A
 at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 48 V rated value at 60 V rated value at 60 V rated value at 110 V rated value at 110 V rated value 	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A
 at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 60 V rated value at 110 V rated value at 110 V rated value at 110 V rated value 	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
 at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 48 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A
at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 48 V rated value at 48 V rated value at 48 V rated value at 40 V rated value at 600 V rated value at 600 V rated value at 125 V rated value at 600 V rated value contact reliability of auxiliary contacts	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
 at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 600 V rated value at 24 V rated value at 24 V rated value at 48 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 600 V rated value 	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 48 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 600 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 480 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value	3 A 2 A 1 A 10 A 6 A 6 A 8 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
 at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 24 V rated value at 48 V rated value at 48 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 125 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 280 V rated value at 600 V rated value at 600 V rated value at 600 V rated value at 480 V rated value at 480 V rated value at 600 V rated value 	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 125 V rated value at 126 V rated value at 127 V rated value at 220 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value pielded mechanical performance [hp]	3 A 2 A 1 A 10 A 6 A 6 A 8 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
 at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 480 V rated value at 600 V rated value 	3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
 at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 60 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 125 V rated value at 220 V rated value at 600 V rated value for stop Tated value at 600 V rated value at 110/120 V rated value 	3 A 2 A 1 A 10 A 6 A 6 A 8 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A 11 A
 at 400 V rated value at 500 V rated value at 690 V rated value operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 480 V rated value at 600 V rated value 	3 A 2 A 1 A 10 A 6 A 6 A 8 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)

 — at 200/208 V rated value 	3 hp
 — at 220/230 V rated value 	3 hp
 — at 460/480 V rated value 	7.5 hp
— at 575/600 V rated value	10 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link	
 for short-circuit protection of the main circuit 	
 — with type of coordination 1 required 	gG: 50A (690V,100kA), aM: 20A (690V,100kA), BS88: 35A (415V,80kA)
— with type of assignment 2 required	gG: 20A (690V,100kA), aM: 16A (690V, 100kA), BS88: 20A (415V, 80kA)
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	standing, on horizontal mounting surface
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
side-by-side mounting	Yes
height	58 mm
width	45 mm
depth	73 mm
required spacing	
 with side-by-side mounting 	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
 for grounded parts 	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	<u>, </u>
type of electrical connection	
• for main current circuit	screw-type terminals
 for auxiliary and control circuit 	screw-type terminals
 at contactor for auxiliary contacts 	Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
— solid or stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
at AWG cables for main contacts	2x (20 16), 2x (18 14), 2x 12
connectable conductor cross-section for main contacts	
• solid	0.5 4 mm²
• stranded	0.5 4 mm²
finely stranded with core end processing	0.5 2.5 mm ²
connectable conductor cross-section for auxiliary	
contacts • solid or stranded	0.5 4 mm²
	0.5 4 mm²
finely stranded with core end processing type of connectable conductor cross sections	0.0 2.0 HIIII
type of connectable conductor cross-sections	
for auxiliary contacts solid or stranded	2v (0.5
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²

 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 at AWG cables for auxiliary contacts 	2x (20 16), 2x (18 14), 2x 12
AWG number as coded connectable conductor cross section	
 for main contacts 	20 12
 for auxiliary contacts 	20 12
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
with high demand rate according to SN 31920	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 y
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
suitability for use	
 safety-related switching OFF 	Yes
Certificates/ approvals	

ocitificates, approvais

General Product Approval



Confirmation





<u>KC</u>



Functional
EMC Safety/Safety of Declaration of Conformity Test Certificates
Machinery



Type Examination Certificate





Special Test Certificate

Type Test Certificates/Test Report

Marine / Shipping













Marine / Shipping

other



Confirmation



Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2017-1AP02-1AA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2017-1AP02-1AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RT2017-1AP02-1AA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2017-1AP02-1AA0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2017-1AP02-1AA0/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2017-1AP02-1AA0&objecttype=14&gridview=view1







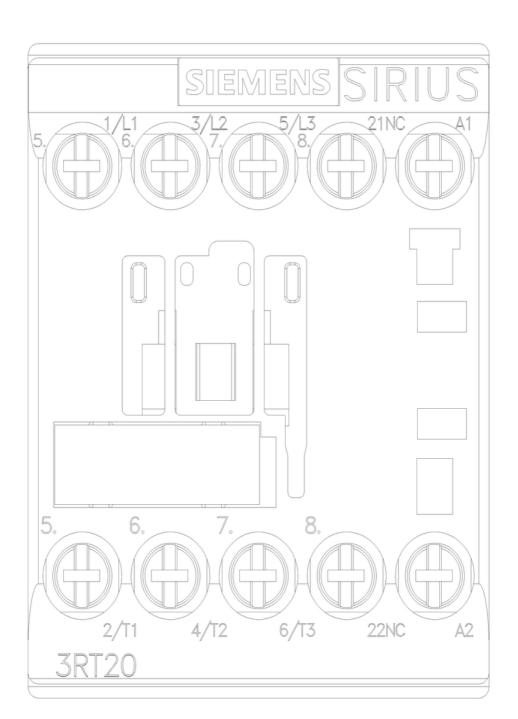

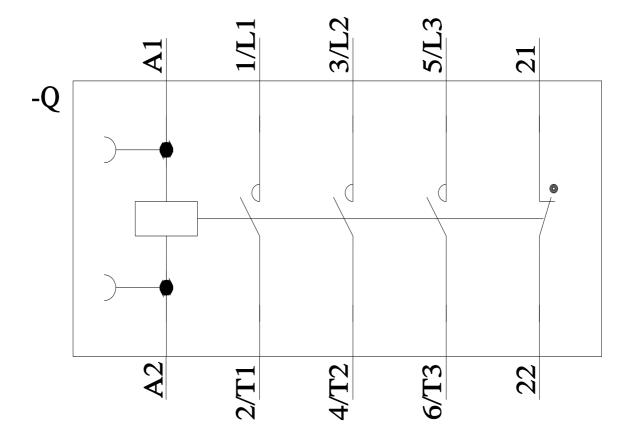

last modified: 6/2/2022 🖸