## **SIEMENS**

## **Data sheet**

## 3RA2115-1KA17-1AP6



Fuseless motor starter Direct start 600VAC Size S00 9-12.5 Amp 220/240VAC 50/60HZ screw connection For screw mounting Or 35 mm rail-mounting Type of coordination 1 1NO+1NC (MSP) 1NO (contactor)

product brand name	SIRIUS
product designation	non-fused motor starter 3RA2
design of the product	direct starter
manufacturer's article number	
<ul> <li>of the supplied contactor</li> </ul>	3RT2017-1AP61
<ul> <li>of the supplied circuit-breakers</li> </ul>	3RV2011-1KA15
<ul> <li>of the supplied link module</li> </ul>	3RA1921-1DA00
General technical data	
size of the circuit-breaker	S00
size of load feeder	S00
product extension auxiliary switch	Yes
insulation voltage with degree of pollution 3 at AC rated value	690 V
degree of pollution	3
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	6g / 11 ms
mechanical service life (switching cycles) of contactor typical	30 000 000
type of assignment	1
Ambient conditions	
ambient temperature	
<ul> <li>during operation</li> </ul>	-20 +60 °C
during storage	-50 +80 °C
<ul> <li>during transport</li> </ul>	-55 +80 °C
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current-dependent overload release	9 12.5 A
operating voltage	
rated value	690 V
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
operating frequency rated value	50 60 Hz
operational current at AC-3 at 400 V rated value	11.5 A
operating power at AC-3	
• at 400 V rated value	5 500 W
• at 500 V rated value	7 500 W
Control circuit/ Control	
control supply voltage at AC	
• at 50 Hz rated value	220 V

	407 04014
at 50 Hz rated value	187 242 V
at 60 Hz rated value	240 V
at 60 Hz rated value	192 264 V
apparent holding power of magnet coil at AC	6.5 VA
inductive power factor with the holding power of the coil	0.25
Auxiliary circuit	
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	2
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal (bimetallic)
response value current of instantaneous short-circuit trip unit	162.5 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	11 A
<ul> <li>at 600 V rated value</li> </ul>	11 A
yielded mechanical performance [hp]	
for single-phase AC motor	
— at 110/120 V rated value	0.5 hp
— at 230 V rated value	2 hp
• for 3-phase AC motor	
— at 200/208 V rated value	3 hp
— at 220/230 V rated value	3 hp
— at 460/480 V rated value	7.5 hp
— at 575/600 V rated value	10 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
conditional short-circuit current (Iq)	
conditional offort of out our one (14)	
at 400 V according to IEC 60947-4-1 rated value	153 000 A
	153 000 A
at 400 V according to IEC 60947-4-1 rated value	153 000 A vertical
• at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions	
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position	vertical
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method height	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing     for grounded parts	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing     for grounded parts — forwards	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing     for grounded parts         — forwards         — backwards         — upwards         — at the side	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing     for grounded parts	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing     for grounded parts         — forwards         — backwards         — upwards         — at the side	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 9 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing     ofor grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         ofor live parts         — forwards         — forwards	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 9 mm 10 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 9 mm 10 mm 0 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method height width depth required spacing  at for grounded parts — forwards — backwards — upwards — at the side — downwards  for live parts — forwards — backwards — upwards — upwards — upwards — to rive parts — forwards — backwards — backwards — upwards	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 10 mm 10 mm 0 mm 20 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing     for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         — forwards         — forwards         — upwards         — upwards         — downwards         — backwards         — upwards         — downwards         — backwards         — backwards         — backwards         — backwards         — upwards         — downwards         — downwards         — downwards	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method height width depth  required spacing  at for grounded parts  - forwards  - backwards  - upwards  - at the side  - downwards  for live parts  - backwards  - backwards  - downwards  at the side  - downwards  - backwards  - backwards  - backwards  - backwards  - at the side  - downwards  - at the side  - downwards  - at the side	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 10 mm 10 mm 0 mm 20 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing     for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         — forwards         — forwards         — upwards         — upwards         — downwards         — backwards         — upwards         — downwards         — backwards         — backwards         — backwards         — backwards         — upwards         — downwards         — downwards         — downwards	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method height width depth  required spacing  at for grounded parts  - forwards  - backwards  - upwards  - at the side  - downwards  for live parts  - backwards  - backwards  - downwards  at the side  - downwards  - backwards  - backwards  - backwards  - backwards  - at the side  - downwards  - at the side  - downwards  - at the side	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method height width depth  required spacing  at for grounded parts  - forwards  - backwards  - upwards  - at the side  - downwards  for live parts  - forwards  - backwards  - at the side  - downwards  - to forwards  - to	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 10 mm 0 mm 10 mm 0 mm 9 mm 10 mm 9 mm 10 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method height width depth required spacing  • for grounded parts — forwards — backwards — upwards — at the side — downwards  • for live parts — forwards — backwards — upwards — at the side — downwards — to rule parts — forwards — backwards — upwards — backwards — upwards — at the side  Connections/ Terminals  type of electrical connection for main current circuit	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm 9 mm 10 mm 20 mm 5 mm 20 mm 9 mm 10 mm 10 mm 9 mm 10 mm 10 mm 9 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing      for grounded parts	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm 20 mm 10 mm 20 mm 20 mm 10 mm 20 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  at for grounded parts  - forwards  - backwards  - upwards  - at the side  - downwards  for live parts  - forwards  - backwards  - upwards  - at the side  - downwards  - torwards  - backwards  - upwards  - backwards  - upwards  - torwards	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm 9 mm 10 mm 20 mm 5 mm 20 mm 9 mm 10 mm 10 mm 10 mm 10 mm 10 mm 9 mm
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width  depth required spacing	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm 9 mm screw-type terminals  0.5 4 mm², 2x (0.75 2.5 mm²) 2x (20 16), only for contactor 2x (18 14), 2x 12
at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing  for grounded parts  forwards  backwards  upwards  at the side  downwards  for live parts  forwards  upwards  at the side  downwards  for lawards  upwards  for lawards  forwards  formain current circuit  for main contacts stranded  for main contacts  connectable conductor cross-section for main contacts  finely stranded with core end processing	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm  0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm 9 mm screw-type terminals  0.5 4 mm², 2x (0.75 2.5 mm²) 2x (20 16), only for contactor 2x (18 14), 2x 12

proportion of dangerous failures with high demand rate according to SN 31920

protection class IP on the front according to IEC 60529

touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front

Certificates/ approvals

**General Product Approval** 

For use in hazardous locations Declaration of Conformity



Confirmation









Declaration of Conformity

**Test Certificates** 

Marine / Shipping



Type Test Certificates/Test Report

Special Test Certificate







Marine / Shipping





Confirmation

other

Vibration and Shock

Railway

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2115-1KA17-1AP6

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2115-1KA17-1AP6

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-1KA17-1AP6

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$ 


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2115-1KA17-1AP6&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-1KA17-1AP6/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2115-1KA17-1AP6&objecttype=14&gridview=view1

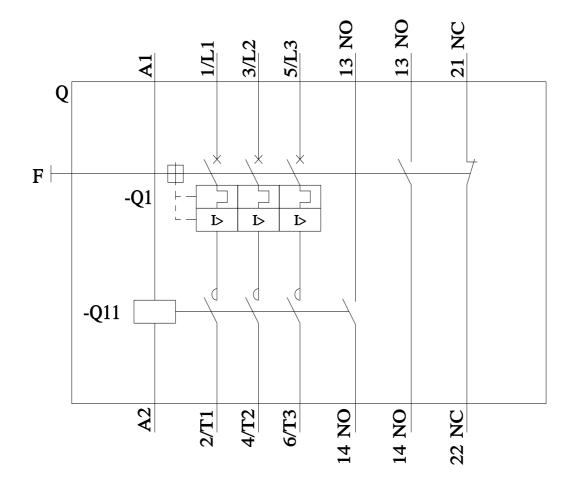

last modified: 12/15/2020 🖸