SIEMENS

Data sheet 3RT2024-2NB30



power contactor, AC-3 12 A, 5.5 kW / 400 V 1 NO + 1 NC, AC (50-60 Hz) DC operation 21-28 V AC/DC 3-pole, Size S0 Spring-type terminal

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
Seneral technical data	
size of contactor	S0
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	0.9 W
 at AC in hot operating state per pole 	0.3 W
 without load current share typical 	2 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	6 kV
 of auxiliary circuit rated value 	6 kV
maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	7,5g / 5 ms, 4,7g / 10 ms
• at DC	10g / 5 ms, 7,5g / 10 ms
shock resistance with sine pulse	
• at AC	11,8g / 5 ms, 7,4g / 10 ms
• at DC	15g / 5 ms, 10g / 10 ms
mechanical service life (switching cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C

relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
lain circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
 at AC-3 rated value maximum 	690 V
 at AC-3e rated value maximum 	690 V
operational current	
 at AC-1 at 400 V at ambient temperature 40 °C rated value at AC-1 	40 A
— up to 690 V at ambient temperature 40 $^{\circ}\text{C}$ rated value	40 A
— up to 690 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	35 A
• at AC-3	
— at 400 V rated value	12 A
— at 500 V rated value	12 A
— at 690 V rated value	9 A
• at AC-3e	
— at 400 V rated value	12 A
— at 500 V rated value	12 A
— at 690 V rated value	9 A
 at AC-4 at 400 V rated value 	12.5 A
at AC-5a up to 690 V rated value	35.2 A
at AC-5b up to 400 V rated value	9.9 A
• at AC-6a	
up to 230 V for current peak value n=20 rated value	11.4 A
 up to 400 V for current peak value n=20 rated value 	11.4 A
 up to 500 V for current peak value n=20 rated value 	11.3 A
— up to 690 V for current peak value n=20 rated value	9 A
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	7.6 A
 up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated 	7.6 A
value — up to 690 V for current peak value n=30 rated — up to 690 V for current peak value n=30 rated	7.6 A
value minimum cross-section in main circuit at maximum AC-1	10 mm ²
operational current for approx. 200000 operating	
cycles at AC-4	
at 400 V rated value	5.5 A
at 690 V rated value	5.5 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	35 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	5 A

— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
 with 3 current paths in series at DC-1 	
— at 24 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	35 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
	1.4 A
• at 1 current path at DC-3 at DC-5	20.4
— at 24 V rated value	20 A
— at 110 V rated value	2.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.09 A
— at 600 V rated value	0.06 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	35 A
— at 110 V rated value	15 A
— at 220 V rated value	3 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
• with 3 current paths in series at DC-3 at DC-5	
— at 24 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	10 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
operating power	
• at AC-3	
— at 230 V rated value	3 kW
— at 400 V rated value	5.5 kW
— at 500 V rated value	
	5.5 kW
— at 690 V rated value	7.5 kW
• at AC-3e	
— at 230 V rated value	3 kW
— at 400 V rated value	5.5 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	7.5 kW
operating power for approx. 200000 operating cycles	
at AC-4	2.6 MW
• at 400 V rated value	2.6 kW
at 690 V rated value	4.6 kW
operating apparent power at AC-6a	45174
up to 230 V for current peak value n=20 rated value	4.5 kVA
• up to 400 V for current peak value n=20 rated value	7.8 kVA
 up to 500 V for current peak value n=20 rated value 	9.8 kVA
up to 690 V for current peak value n=20 rated value	10.7 kVA
operating apparent power at AC-6a	
• up to 230 V for current peak value n=30 rated value	3 kVA
• up to 400 V for current peak value n=30 rated value	5.2 kVA
• up to 500 V for current peak value n=30 rated value	6.5 kVA
• up to 690 V for current peak value n=30 rated value	9 kVA
short-time withstand current in cold operating state up to 40 °C	
 limited to 1 s switching at zero current maximum 	210 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 5 s switching at zero current maximum	210 A; Use minimum cross-section acc. to AC-1 rated value
limited to 10 s switching at zero current maximum	162 A; Use minimum cross-section acc. to AC-1 rated value
limited to 30 s switching at zero current maximum	103 A; Use minimum cross-section acc. to AC-1 rated value
limited to 60 s switching at zero current maximum	88 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	30 A, 300 minimum oraco-accitor acc. to AC-1 fateu value
at AC	1 500 1/h
• at DC	1 500 1/h
♦ at DO	1 000 1/11

operating frequency	
• at AC-1 maximum	1 000 1/h
 at AC-2 maximum 	1 000 1/h
 at AC-3 maximum 	1 000 1/h
 at AC-3e maximum 	1 000 1/h
at AC-4 maximum	300 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
 at 50 Hz rated value 	21 28 V
at 60 Hz rated value	21 28 V
control supply voltage at DC	
rated value	21 28 V
operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.7
full-scale value	1.3
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.7 1.3
● at 60 Hz	0.7 1.3
design of the surge suppressor	with varistor
inrush current peak	3 A
duration of inrush current peak	30 µs
locked-rotor current mean value	0.3 A
locked-rotor current peak	0.52 A
duration of locked-rotor current	180 ms
holding current mean value	45 mA
apparent pick-up power of magnet coil at AC	
● at 50 Hz	6.6 VA
• at 60 Hz	6.7 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.98
• at 60 Hz	0.98
apparent holding power of magnet coil at AC	40.1/4
• at 50 Hz	1.9 VA
• at 60 Hz	2 VA
inductive power factor with the holding power of the coil	0.00
• at 50 Hz	0.86
• at 60 Hz	0.82
closing power of magnet coil at DC	5.9 W
holding power of magnet coil at DC	1.4 W
closing delay	50 00
• at AC	50 80 ms
• at DC	50 75 ms
opening delay	20 50 mg
• at AC	30 50 ms 30 50 ms
• at DC	30 50 ms
arcing time control version of the switch operating mechanism	10 10 ms Standard A1 - A2
	Glandalu A I - AZ
Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact	1
number of NO contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
at 230 V rated value	10 A
at 400 V rated value	3 A
at 500 V rated value at 500 V rated value	2 A
- at ooo v rated value	271

-4 000 \/41	4.0
at 690 V rated value	1 A
operational current at DC-12	40.4
at 24 V rated value	10 A
at 48 V rated value	6 A
at 60 V rated value	6 A
at 110 V rated value	3 A
 at 125 V rated value 	2 A
at 220 V rated value	1 A
at 600 V rated value	0.15 A
operational current at DC-13	
 at 24 V rated value 	10 A
 at 48 V rated value 	2 A
 at 60 V rated value 	2 A
 at 110 V rated value 	1 A
at 125 V rated value	0.9 A
at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	11 A
at 400 V rated value at 600 V rated value	11 A
yielded mechanical performance [hp]	
• for single-phase AC motor	
— at 110/120 V rated value	1 hn
— at 230 V rated value	1 hp
	2 hp
• for 3-phase AC motor	2 hm
— at 200/208 V rated value	3 hp
— at 220/230 V rated value	3 hp
— at 460/480 V rated value	7.5 hp
— at 575/600 V rated value	10 hp
— at 575/600 V rated value contact rating of auxiliary contacts according to UL	
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection	10 hp
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link	10 hp
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit	10 hp A600 / P600
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required	10 hp A600 / P600 gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA)
 at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required with type of assignment 2 required 	10 hp A600 / P600 gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA)
 — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required for short-circuit protection of the auxiliary switch 	10 hp A600 / P600 gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA)
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	10 hp A600 / P600 gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA)
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	10 hp A600 / P600 gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA)
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	10 hp A600 / P600 gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	10 hp A600 / P600 gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes 102 mm
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes 102 mm 45 mm
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes 102 mm 45 mm
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes 102 mm 45 mm
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes 102 mm 45 mm 107 mm
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes 102 mm 45 mm 107 mm
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes 102 mm 45 mm 10 mm 10 mm 10 mm
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes 102 mm 45 mm 10 mm 10 mm
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes 102 mm 45 mm 10 mm 10 mm 10 mm 0 mm
- at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes 102 mm 45 mm 107 mm 10 mm 10 mm 10 mm 10 mm
- at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — torwards — upwards — upwards — torwards — upwards	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes 102 mm 45 mm 107 mm 10 mm 10 mm 10 mm 10 mm
— at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — upwards — at the side • for grounded parts — forwards — upwards — at the side	10 hp A600 / P600 gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes 102 mm 45 mm 10 mm
- at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — torwards — upwards — upwards — torwards — upwards	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA) gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 Yes 102 mm 45 mm 107 mm 10 mm 10 mm 10 mm 10 mm

— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	spring-loaded terminals
for auxiliary and control circuit	spring-loaded terminals
at contactor for auxiliary contacts	Spring-type terminals
of magnet coil	Spring-type terminals Spring-type terminals
type of connectable conductor cross-sections	Opining type terminals
• for main contacts	
— solid	2x (1 10 mm²)
solid or stranded	2x (1 10 mm²)
— finely stranded with core end processing	2x (1 6 mm²)
— finely stranded without core end processing	2x (1 6 mm²)
at AWG cables for main contacts	2x (18 8)
connectable conductor cross-section for main	
contacts	
• solid	1 10 mm²
stranded	1 10 mm²
 finely stranded with core end processing 	1 6 mm²
finely stranded without core end processing	1 6 mm²
connectable conductor cross-section for auxiliary	
contacts	0.5 0.5 2
solid or stranded	0.5 2.5 mm ²
finely stranded with core end processing	0.5 1.5 mm ²
finely stranded without core end processing	0.5 2.5 mm²
type of connectable conductor cross-sections	
 for auxiliary contacts — solid or stranded 	2v /0 F 2 F mm ² \
	2x (0.5 2.5 mm²)
 finely stranded with core end processing finely stranded without core end processing 	2x (0.5 1.5 mm²)
at AWG cables for auxiliary contacts	2x (0.5 2.5 mm²) 2x (20 14)
AWG number as coded connectable conductor cross	ZA (20 1 7)
section	
for main contacts	18 8
for auxiliary contacts	20 14
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
B10 value with high demand rate according to SN 31920	450 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 y
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
suitability for use	
safety-related switching OFF	Yes
Certificates/ approvals	
General Product Approval	



Confirmation





<u>KC</u>



Functional
Safety/Safety of
Machinery

Declaration of Conformity

Test Certificates



Type Examination
Certificate



Type Test Certificates/Test Report

Special Test Certificate

Test Certificates

Marine / Shipping

Miscellaneous











Marine / Shipping

other

Dangerous Good





Confirmation



Confirmation

<u>Transport Information</u>

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2024-2NB30

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2024-2NB30

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$

https://support.industry.siemens.com/cs/ww/en/ps/3RT2024-2NB30

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2024-2NB30&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2024-2NB30/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2024-2NB30&objecttype=14&gridview=view1







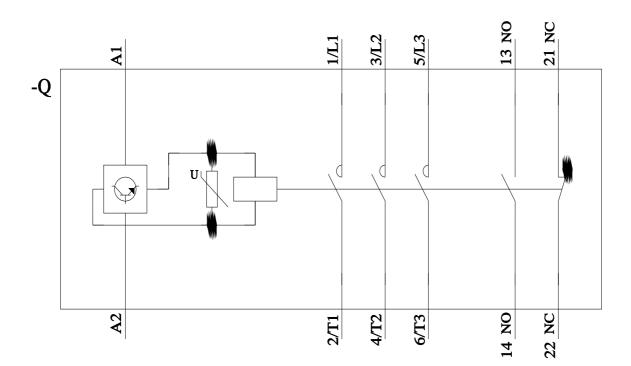

last modified: 6/2/2022 🖸