SIEMENS

Data sheet 3RT2015-1AR62



Power contactor, AC-3 7 A, 3 kW / 400 V 1 NC, 400 V AC, 50 Hz 400-440 V, 60 Hz, 3-pole, Size S00, screw terminal

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S00
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	0.6 W
 at AC in hot operating state per pole 	0.2 W
without load current share typical	4.8 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	6 kV
 of auxiliary circuit rated value 	6 kV
maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	6,7g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	10,5g / 5 ms, 6,6g / 10 ms
mechanical service life (switching cycles)	
 of contactor typical 	30 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operational current	
at AC-1 at 400 V at ambient temperature 40 °C rated value	18 A
• at AC-1	
— up to 690 V at ambient temperature 40 $^{\circ}\text{C}$ rated value	18 A
— up to 690 V at ambient temperature 60 °C rated value	16 A
• at AC-3	
— at 400 V rated value	7 A
— at 500 V rated value	6 A
— at 690 V rated value	4.9 A
• at AC-3e	
— at 400 V rated value	7 A
— at 500 V rated value	6 A
— at 690 V rated value	4.9 A
• at AC-4 at 400 V rated value	6.5 A
at AC-5a up to 690 V rated value	15.8 A
at AC-5b up to 400 V rated value	5.8 A
• at AC-6a	0.071
up to 230 V for current peak value n=20 rated value	4 A
— up to 400 V for current peak value n=20 rated value	4 A
 up to 500 V for current peak value n=20 rated value 	3.8 A
— up to 690 V for current peak value n=20 rated value	3.6 A
 at AC-6a up to 230 V for current peak value n=30 rated value 	2.7 A
— up to 400 V for current peak value n=30 rated value	2.7 A
 up to 500 V for current peak value n=30 rated value 	2.5 A
— up to 690 V for current peak value n=30 rated value	2.4 A
minimum cross-section in main circuit at maximum AC-1 rated value operational current for approx. 200000 operating	2.5 mm²
cycles at AC-4	
at 400 V rated value	2.6 A
at 690 V rated value	1.8 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	15 A
— at 110 V rated value	1.5 A
— at 220 V rated value	0.6 A
— at 440 V rated value	0.42 A
— at 600 V rated value	0.42 A
with 2 current paths in series at DC-1	0.127
— at 24 V rated value	15 A
— at 24 V rated value — at 110 V rated value	8.4 A
	1.2 A
— at 220 V rated value	
— at 440 V rated value	0.6 A
— at 600 V rated value	0.5 A
 with 3 current paths in series at DC-1 	

1041/	47.4
— at 24 V rated value	15 A
— at 110 V rated value	15 A
— at 220 V rated value	15 A
— at 440 V rated value	0.9 A
— at 600 V rated value	0.7 A
 at 1 current path at DC-3 at DC-5 	
— at 24 V rated value	15 A
— at 110 V rated value	0.1 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	15 A
— at 110 V rated value	0.25 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	15 A
— at 110 V rated value	15 A
— at 220 V rated value	1.2 A
— at 440 V rated value	0.14 A
— at 600 V rated value	0.14 A
operating power	
• at AC-3	
— at 230 V rated value	1.5 kW
— at 400 V rated value	3 kW
— at 500 V rated value	3 kW
— at 690 V rated value	4 kW
• at AC-3e	
— at 230 V rated value	1.5 kW
— at 400 V rated value	3 kW
— at 500 V rated value	3 kW
— at 690 V rated value	4 kW
	4 600
operating power for approx. 200000 operating cycles at AC-4	
at 400 V rated value	1.15 kW
at 690 V rated value	1.15 kW
operating apparent power at AC-6a	1.10 KW
• up to 230 V for current peak value n=20 rated value	1.5 kVA
 up to 400 V for current peak value n=20 rated value 	2.7 kVA
 up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value 	3.3 kVA
 up to 690 V for current peak value n=20 rated value 	4.3 kVA
·	4.5 KVA
operating apparent power at AC-6a	1 kVA
up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=20 rated value	
up to 400 V for current peak value n=30 rated value	1.8 kVA
up to 500 V for current peak value n=30 rated value	2.2 kVA
up to 690 V for current peak value n=30 rated value	2.9 kVA
short-time withstand current in cold operating state up to 40 °C	
•	120 A; Use minimum cross-section acc. to AC-1 rated value
limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum	
limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum	86 A; Use minimum cross-section acc. to AC-1 rated value
limited to 10 s switching at zero current maximum limited to 20 s switching at zero current maximum	67 A; Use minimum cross-section acc. to AC-1 rated value
limited to 30 s switching at zero current maximum	52 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 60 s switching at zero current maximum	43 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	40,000,475
• at AC	10 000 1/h
operating frequency	4 000 4/b
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	750 1/h
• at AC-3e maximum	750 1/h
at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	

 at 50 Hz rated value 	400 V
 at 60 Hz rated value 	440 V
operating range factor control supply voltage rated	
value of magnet coil at AC	
● at 50 Hz	0.8 1.1
● at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	26.4 VA
● at 60 Hz	31.7 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.81
● at 60 Hz	0.81
apparent holding power of magnet coil at AC	
● at 50 Hz	4.4 VA
• at 60 Hz	4.8 VA
inductive power factor with the holding power of the	
coil	
● at 50 Hz	0.24
● at 60 Hz	0.25
closing delay	
• at AC	9 35 ms
opening delay	
• at AC	7 13 ms
arcing time	10 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
at 230 V rated value	10 A
at 400 V rated value	3 A
at 500 V rated value at 500 V rated value	2 A
at 690 V rated value	1 A
operational current at DC-12	IA
• at 24 V rated value	10 A
• at 48 V rated value	6 A
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 125 V rated value	2 A
at 220 V rated value	1 A
at 600 V rated value	0.15 A
operational current at DC-13	40.4
• at 24 V rated value	10 A
• at 48 V rated value	2 A
at 60 V rated value	2 A
 at 110 V rated value 	1 A
 at 125 V rated value 	0.9 A
• at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	4.8 A
• at 600 V rated value	6.1 A
yielded mechanical performance [hp]	
for single-phase AC motor	
— at 110/120 V rated value	0.25 hp
— at 230 V rated value	0.75 hp
• for 3-phase AC motor	
— at 200/208 V rated value	1.5 hp
at EvolEvo V Tatou Valuo	LIX LIK

— at 220/230 V rated value	2 hp		
— at 460/480 V rated value	3 hp		
— at 575/600 V rated value	5 hp		
contact rating of auxiliary contacts according to UL	A600 / Q600		
Short-circuit protection			
design of the fuse link			
 for short-circuit protection of the main circuit 			
 — with type of coordination 1 required 	gG: 35A (690V,100kA), aM: 20A (690V,100kA), BS88: 35A (415V,80kA)		
 — with type of assignment 2 required 	gG: 20A (690V,100kA), aM: 16A (690V, 100kA), BS88: 20A (415V,		
	80kA)		
 for short-circuit protection of the auxiliary switch required 	gG: 10 A (500 V, 1 kA)		
Installation/ mounting/ dimensions			
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted		
mounting position	forward and backward by +/- 22.5° on vertical mounting surface		
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail		
-	according to DIN EN 60715		
side-by-side mounting	Yes		
height	58 mm		
width	45 mm		
depth	73 mm		
required spacing			
with side-by-side mounting			
— forwards	10 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	0 mm		
for grounded parts			
— forwards	10 mm		
— upwards	10 mm		
— at the side	6 mm		
— downwards	10 mm		
• for live parts			
— forwards	10 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	6 mm		
Connections/ Terminals			
type of electrical connection			
for main current circuit	screw-type terminals		
 for auxiliary and control circuit 	screw-type terminals		
 at contactor for auxiliary contacts 	Screw-type terminals		
of magnet coil	Screw-type terminals		
type of connectable conductor cross-sections			
• for main contacts			
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²		
— solid or stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²		
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)		
at AWG cables for main contacts	2x (20 16), 2x (18 14), 2x 12		
connectable conductor cross-section for main contacts			
• solid	0.5 4 mm²		
stranded	0.5 4 mm²		
finely stranded with core end processing	0.5 2.5 mm ²		
connectable conductor cross-section for auxiliary	0.0 2.0 Hilli		
contacts			
solid or stranded	0.5 4 mm²		
finely stranded with core end processing	0.5 2.5 mm ²		
type of connectable conductor cross-sections			
for auxiliary contacts			
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²		
	, , , , , , , , , , , , , , , , , , , ,		

 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)			
at AWG cables for auxiliary contacts	2x (20 16), 2x (18 14), 2x 12			
AWG number as coded connectable conductor cross section				
 for main contacts 	20 12			
 for auxiliary contacts 	20 12			
Safety related data				
product function				
mirror contact according to IEC 60947-4-1	Yes			
B10 value with high demand rate according to SN 31920	1 000 000			
proportion of dangerous failures				
 with low demand rate according to SN 31920 	40 %			
with high demand rate according to SN 31920	73 %			
failure rate [FIT] with low demand rate according to SN 31920	100 FIT			
T1 value for proof test interval or service life according to IEC 61508	20 y			
protection class IP on the front according to IEC 60529	IP20			
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front			
suitability for use				
 safety-related switching OFF 	Yes			
Certificates/ approvals				

(F)

General Product Approval

Confirmation





<u>KC</u>



EMC	Safety/Safety of Machinery	Declaration of Conformity		Test Certificates	
€	Type Examination Certificate	C €	UK CA	Special Test Certificate	Type Test Certificates/Test Report

Marine / Shipping













Marine / Shipping other



Confirmation



Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2015-1AR62

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2015-1AR62

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RT2015-1AR62


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2015-1AR62&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2015-1AR62/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2015-1AR62&objecttype=14&gridview=view1







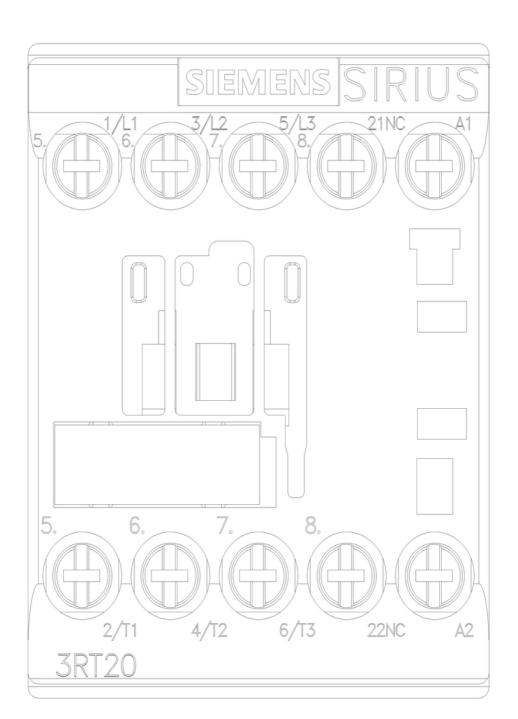

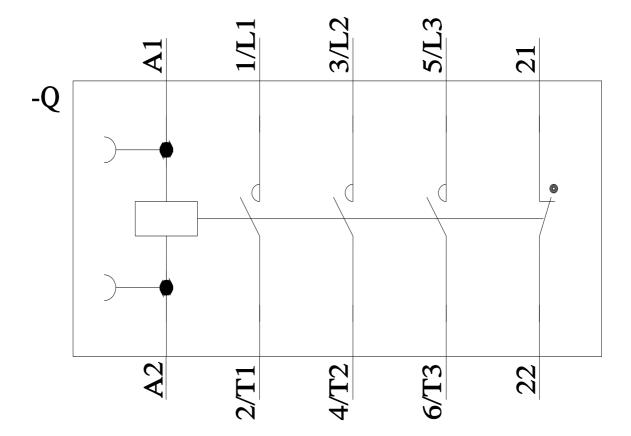

last modified: 6/2/2022 🖸