


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ECO #7578	05/05/09	A.D.M.

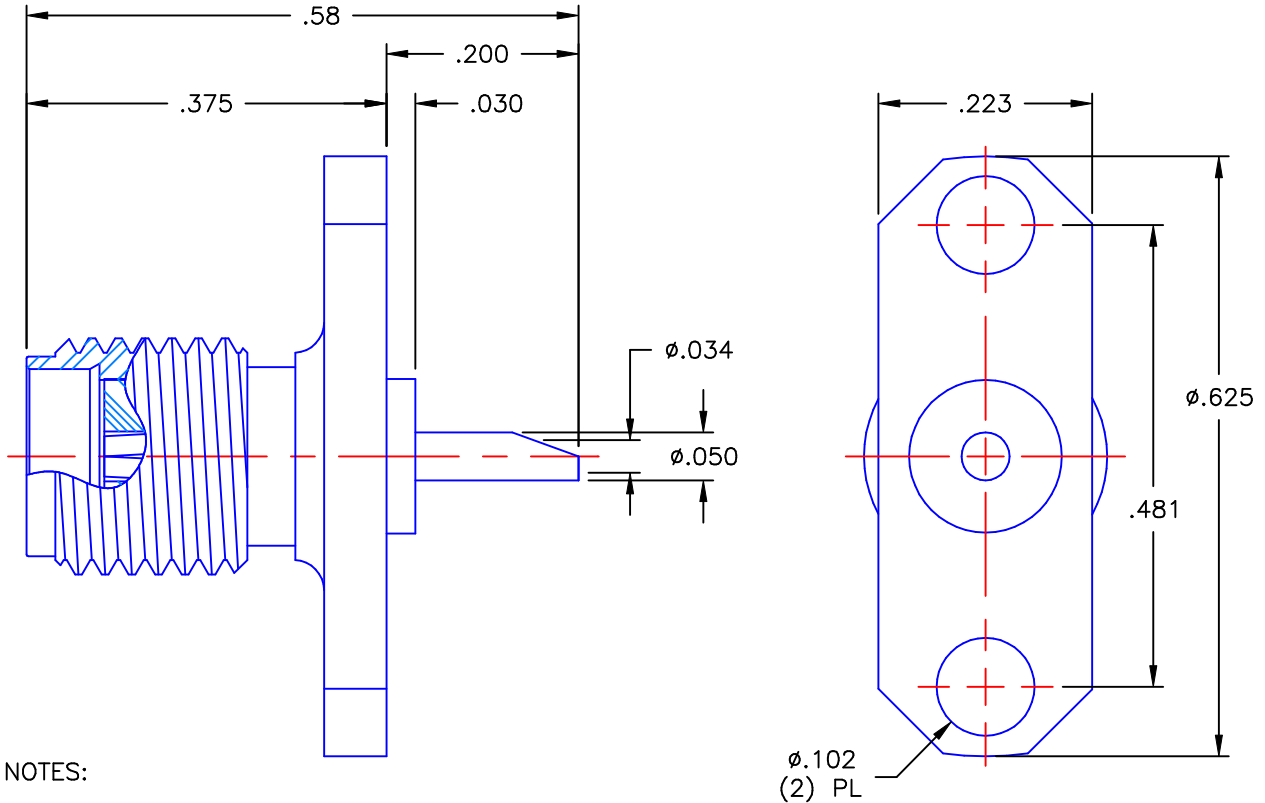

NOTES:


MATERIALS:

1. BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.

FINISHES:

1. BODY = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .000050 TO .00010 STRESS FREE NICKEL PER QQ-N-290.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

Property of Radiall Incorporated
 This document cannot be reproduced or
 communicated to a third party without prior
 written permission of RADIALL Incorporated.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN: A.D.M.	DATE: 05/05/09	 APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Dr. New Haven, CT 06513
	CHKD: D.N.	DATE: 05/05/09	
DECIMAL	ANGLE	APVD: J.M.	DATE: 05/05/09
REFERENCE:		MATERIALS & FINISHES: SEE NOTES	
ORIGINATOR: D.N. DATE: 05/05/00		SIZE: A FSCM NO.: 19505 DWG NO.: 9408-1113-000 SCALE: 5:1	APPLIED ENGINEERING PRODUCTS SMA STRAIGHT PANEL JACK 2 HOLE FLANGE MOUNT SOLDER POT CONTACT THIRD ANGLE PROJECTION SHEET 1 OF 1

9408-1113-000