




LA92-1/2X13-ZS

Ruland Adjustable Clamping Lever, Lever Length 92mm, Tapped Hole 1/2X13, Zinc Lever, Stainless Steel Inserts

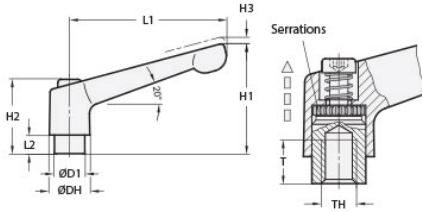


Description

Ruland LA92-1/2X13-ZS is an adjustable clamping handle with a 92mm handle, 1/2X13 tapped hole, 19mm insert diameter, and 64mm overall height. The stainless steel inserts combined with a zinc die-cast handle allow for use in corrosive applications where durability is required. LA92-1/2X13-ZS has a textured finish on the handle making it easy for the user to grip in environments with water, coolant, chemicals, or other liquids. It is commonly found in packaging, printing, food processing, and manufacturing systems where conveyor rails, sensors, screens, and other components require frequent adjustments without the use of tools. The adjustable feature of this handle allows it to be used in confined spaces with limited hand access or where 360 degree rotation is not possible. Serrations connect the insert to the handle for easy disengagement. The user pulls the handle upwards by hand to disengage the serrations allowing it to be swiveled to the desired clamping position. Serrations automatically re-engage once the user releases the handle locking it in-place. A 1/2X13 tapped hole is designed to mate with an equivalently sized threaded stud or rod for a quick installation. LA92-1/2X13-ZS is black to seamlessly integrate with the aesthetics of most equipment. It is manufactured by Otto Ganter, stocked by Ruland, and RoHS3 and REACH compliant.

Product Specifications

Thread (TH)	1/2 in - 13 TPI	Lever Length L1	92 mm
Overall Height H1	64 mm	Hub Height H2	43 mm
Hub Diameter DH	24 mm	Handle Disengagement Travel H3	4 mm
Thread Depth T	17 mm	Sleeve Length L2	11 mm
Sleeve Diameter D1	19 mm	Handle Material	Zinc
Handle Color	Black	Insert and Screw Material	303 Stainless Steel
Weight (lbs)	0.404900	Manufacturer	JW Winco/ Otto Ganter
UPC	634529236802	Country of Origin	Germany
Tariff Code	8487.90.0080	UNSPC	31162807

Note 1 Performance ratings are for guidance only. The user must determine suitability for a particular application.

Prop 65  **WARNING** This product can expose you to chemicals including Soots, Benzene, Lead, and Nickel (metallic), known to the State of California to cause cancer, and Lead and Benzene known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.