


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
T		REV PER ECO 14-014240	10-3-14	CT	CD		

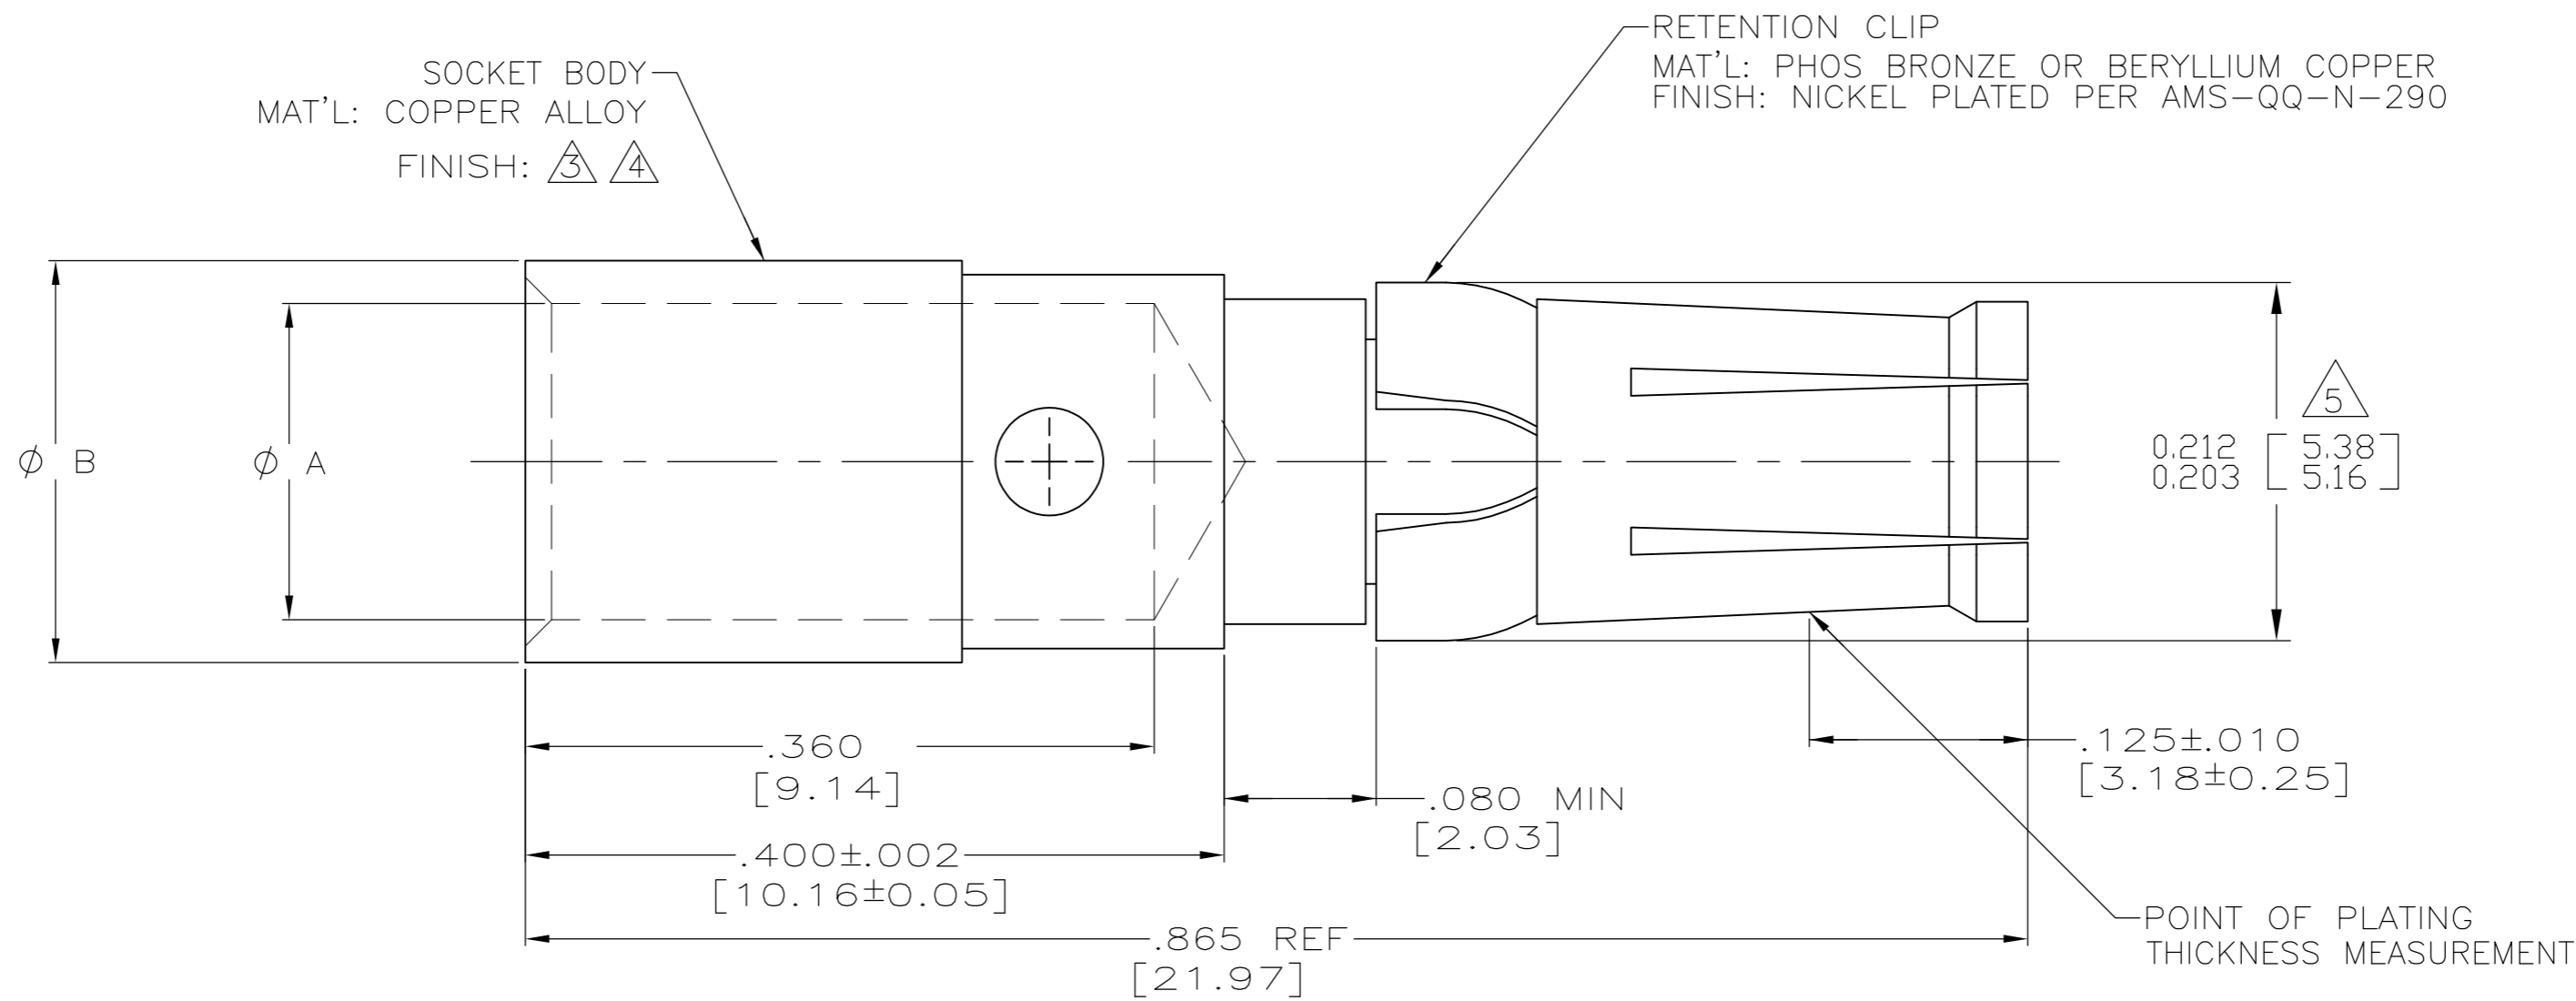

- THIS PART CONFORMS TO REQUIREMENTS FOR DANIELS CRIMP TOOL NO. M300-BT, WITH DANIELS POSITIONER PART NO. SP689, STRIP LENGTH .375, #8 AWG SETTING 7, #10 AWG SETTING 6.
- MATES WITH 211159-1 IN AMPLIMITE CONNECTOR ASSEMBLIES ONLY.
- FINISH: PLATED GOLD .000050 [0.00127] MIN THK PER ASTM-B-488 OVER NICKEL .000050 [0.00127] MIN THK PER AMS-QQ-N-290.
- FINISH: PLATED GOLD .000030 [0.00076] MIN THK PER ASTM-B-488 OVER NICKEL .000050 [0.00127] MIN THK PER AMS-QQ-N-290.
- RING GAGE MUST BE USED TO CHECK THE ϕ .203-.212 DIMENSION.
- RESTRICTED PART NUMBER.

				1-211161-2
				1-211161-1
PRELIMINARY NOT RELEASED FOR PRODUCTION	4	.185 [4.70]	.136 [3.45]	#10 AWG 211161-4
PRELIMINARY NOT RELEASED FOR PRODUCTION	4	.230 [5.84]	.181 [4.60]	#8 AWG 211161-3
	3	.185 [4.70]	.136 [3.45]	#10 AWG 211161-2
	3	.230 [5.84]	.181 [4.60]	#8 AWG 211161-1
FINISH		DIM B	DIM A	WIRE SIZE PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	C.C.THOMAS	9-6-00
CHK	CHAD BAKER	9-6-00
APVD	CHAD BAKER	9-6-00
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT	-	
CUSTOMER DRAWING		

STE TE Connectivity

ASSEMBLY, SOCKET CONTACT
POWER VIII, #8 & #10 AWG

SIZE	A2	CAGE CODE	00779	DRAWING NO	C-211161	RESTRICTED TO	-
SCALE	10:1	SHEET	1 of 1	REV	T		