

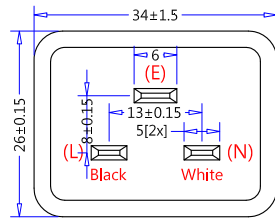



插頭部件 (Plug Component)			頭部剝皮尺寸 (Dimensions)			線材規格 (Wire Styls)	尾部剝皮尺寸 (Dimensions)			尾插部件 (Connector Component)		
顏色(Color)	零件描述(Component)	Qty.	內剝(Strip)	外剝(ROJ)	顏色(Color)	SJT 12AWGx3C 105°C 黑色 (BLACK) Length : 3009.9±50.8 (118.5"±2")	外剝(R.O.J)	內剝(Strip)	顏色(Color)	規格描述(Instruction)	Qty.	顏色(Color)
35P 黑色 (Black)	FM-320 (IEC 60320, C20, 20A 50Hz 250V~)	1	6 ⁺¹ ₋₀	20±2	黑/Black(L)		20±2	5 ⁺¹ ₋₀	黑/Black(L)	FM-319 (IEC 60320, C19, 20A 50Hz 250V~)	1	35P 黑 (Black)
鍍鎳 (Nickel-Plated)	2.0x6.0方形端子(GEM 97607-1) (2.0x6.0 (Computer Solid Blades)	1	6 ⁺¹ ₋₀	20±2	白/White(N)		20±2	5 ⁺¹ ₋₀	白/White(N)	C19 單粒方管端子(GEM 98735-1) (C19 Loose Receptacle Terminal)	3	鍍鎳 (Nickel-Plated)
鍍鎳 (Nickel-Plated)	2.0x5.0方形端子(GEM 97606-1) (2.0x5.0 (Computer Solid Blades)	2	6 ⁺¹ ₋₀	20±2	綠/Green(E)		20±2	5 ⁺¹ ₋₀	綠/Green(E)	GA-033兩件式內模 (2.0x4.0 Serial Housing)	1	黑色 (Black)
黑色 (Black)	033 兩件式內模 (C20 Inner Body)	1										

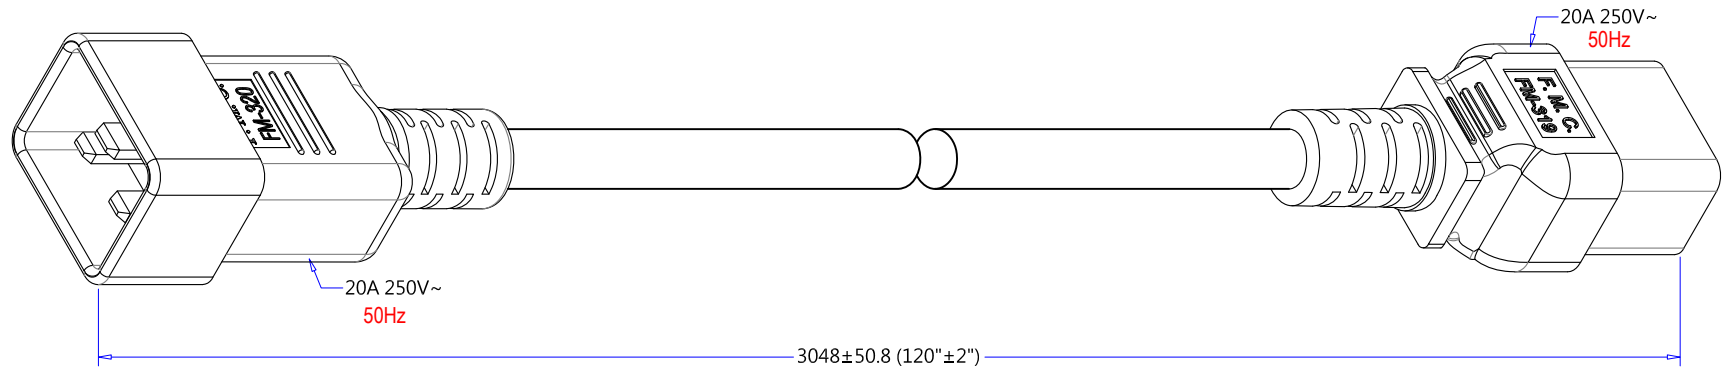


FM-320 (IEC 60320, C20, 20A 250V~)
(Dimensions of Inlets Face)

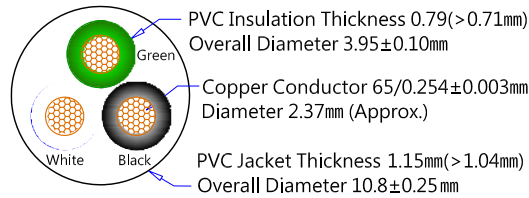

SJT 12AWGx3C 截面圖
(Wire Cross-Section)

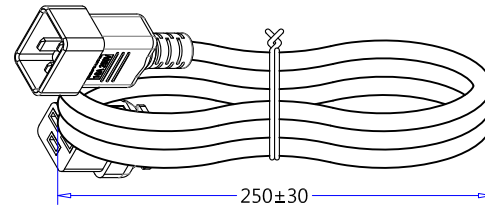

B-C3 扎線圖示 (Tied Loop Hank Detail)

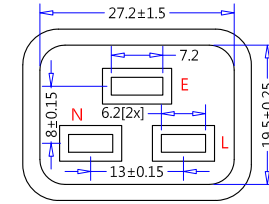

FM-319 (IEC 60320, C19, 20A 250V~)
(Dimensions of Connector Face)

REV	DATE	REVISE CONTENT
A	10/11-2012	According to the customer drawing, need to include approvals UL and cUL.
F		

- NOTE:
- Hi-Pot Test : 1500V/1Sec ; <0.5mA.
 - Insulation Resistance Test : DC 500/min>100 meg-ohm.
 - Continuity & Polarization Test : No short circuit, break circuit, displacement.
 - Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.
 - Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.
 - All material according to Non-toxic standard.(Material must be RoHS compliant.)

線材印字 (Wire Printed)	充實, 油墨印字 (Un-Fillers, Printing Ink)	Approval No. : E77975, E322763		CnC Tech, LLC Industrial Cable and Connector Technology				
包裝方式 (Packing)								
Tied Hank	See Hank Detail	DRAWN		CUSTOMER				
Carton Size	480 x 320 x 250	Chu8.						
Pack Number	25pcs/ <small>UL Laster Labels</small>	DATE		P/N No.		800-12-32D-BL-0010F		
Carton Print	See Purchase Order	10/11-2012		MATERIAL		PVC	UNIT	mm
TYPE	IEC 60320, C20 to IEC 60320, C19, 20A (50Hz) 250V~ Cord Set			Customer Approval				
DRAWNING NO.	067MM229	REV	A					

業務校閱:

品質校閱: