


FILE

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED

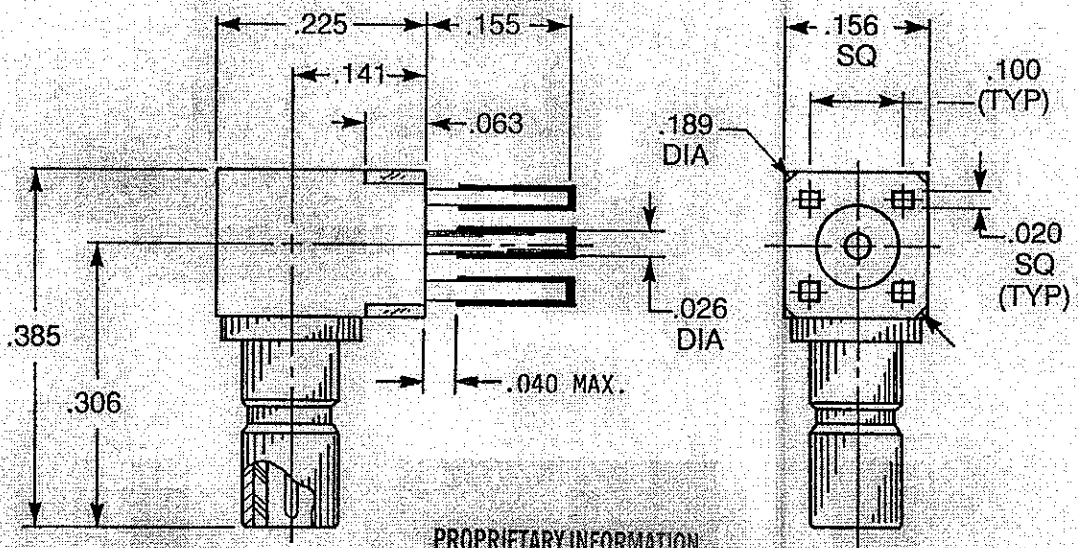

PROPRIETARY INFORMATION
 NOT TO BE RELEASED
 WITHOUT WRITTEN PERMISSION
 FROM AN AUTHORIZED
 REPRESENTATIVE OF
 APPLIED ENGINEERING PRODUCTS.

NOTES:

MATERIAL:

- CONTACTS = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
- INSULATORS = TEFLON, VIRGIN WHITE PER ASTM D1710, GRADE 1, TYPE I, CLASS A.
- ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

- CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C OVER STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
- ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON
 FRAC. 1/64 DECIMAL ANGLES ± 2°

DRAWN D.N. DATE 4-18-97
 CHECKED DATE 4/12/97
 APPROVED DATE 4-18-97
 FINISH: SEE NOTES

APPLIED ENGINEERING PRODUCTS
 104 John W. Murphy Drive, P.O. Box 510
 New Haven, CT 06513

SSMB PRINTED CIRCUIT BOARD
 RIGHT ANGLE JACK RECEPTACLE
 WITH TIN DIPPED LEGS AND CENTER PIN

SIZE CODE IDENT NO. 7210-1511-012
 A 19505

SCALE NTS SHEET 1 OF 1

Design Products Co. Clearprint #1000H