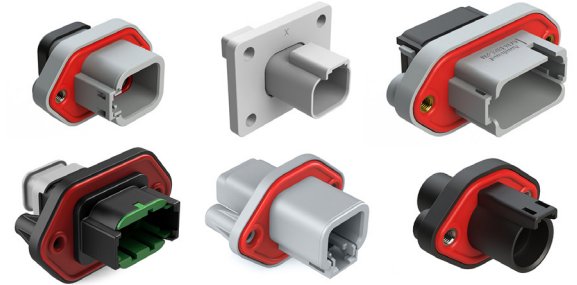




PM Panel|Mate™ Family

PanelMate™ AT: 2, 3, 4, 6, 8, 12, 13 and 18 position
PanelMate™ ATM: 12 position
PanelMate™ ATP: 2, 4 and 6 position
PanelMate™ ATHD: Single Position



Amphenol Sine Systems' **PanelMate™ Family of Receptacles** are engineered with a one-piece, sealed, flanged design for rapid and secure mounting. Their durable, high-temperature, silicone, facial seal provides a barrier of protection from lubricating oils, hydraulic fluids and fossil fuels to withstand the challenges and complexities of harsh environment applications. Also available in a two-piece, sonically-welded, flange design for applications requiring an externally operated connection with 4 pass through holes. All **PanelMate™** product lines accept A Series™ components and are compatible with other industry standard mating connectors.

Our **PanelMate™ AT, ATM, ATP and ATHD Series** meet all the performance criteria and specifications of the AT, ATM, ATP and ATHD Series™, and is available in a variety of color modifications. Contact Customer Service for more information.

Applications: Heavy Duty, Transportation, Marine, Diagnostic, Military, Alternative Energy, Agricultural and other demanding interconnect architectures

- Features**
- Flanged or Flangeless; 180° Straight or 90° Right Angle Pin Orientation
 - Thermoplastic housing with integrated latch for mating
 - High-temperature silicone seals provide superior sealing
 - Wedgelocks ensure proper contact alignment & retention
 - Compatible with existing standard products industry-wide
 - Wide variety of optional back end configurations

PanelMate™ Family Specifications Overview

Wire Range	PanelMate™ AT: Size 16 (14-20AWG); PanelMate™ ATM: Size 20 (16-22AWG) PanelMate™ ATP: Size 12 (10-14AWG); PanelMate™ ATHD: Size 4 (4-6AWG), Size 8 (8-10AWG), Size 12 (10-14AWG)
Amperage	PanelMate™ AT: 2-12 position: Size 16 (13A); 13 position: Size 12 (25A), Size 16 (13A); PanelMate™ ATM: 12 position: Size 20 (7.5A); PanelMate™ ATP: 2-6 position: Size 12 (25A); PanelMate™ ATHD: 1 position: Size 4 (100A), Size 8 (60A), Size 12 (25A)
Operating Temperature	-55°C to +125°C
Housing/Latch	Thermoplastic/Integrated latch for mating
IP Rating (mated)	IP68 (1M of water for 24 hours), IP69K
Dielectric Value	Meets or exceeds 1500 volts minimum
Drop Test	Shall not become detached or loosened when placed at 750mm and dropped to concrete eight times
Shock	No latch disengagement or discontinuity shall be the result when subjected to 50 g's in each of three axis (X, Y & Z)
Vibration	Continued continuity without degradation to mechanical or physical attributes following vibration. (max acceleration 20 g's at Sine sweep of 10-2000Hz)
Connector Terminal Retention	When subjected to a direct pull, contacts achieve a minimum pull-out force of 25 lbs.
Connector Retention	A mated connector subjected to a pulling force by the exiting wire bundle at 25 lbs. times the number of contacts to a maximum of 100 lbs. applying load for 30 seconds
Thermal Shock	Subjected to 10 cycles at -55°C to +125°C with no cracking/chipping/damage detrimental to the normal operation of the connector
Insulation Resistance	1000 megohms minimum at 25°C
Mating Cycle Durability	Following 100 cycles of connection engagement/disengagement, neither mechanical/electrical degradation is evident



A Series™ Family









Standard products. Custom solutions
Customer Service +1 800 394 7732






Back End Configurations (Colors Vary)

 -BL04 Welded Flange, Grey Body, Enhanced Key, Std Rear Seal (Red)	 -BL05 Welded Flange, Grey Body, Enhanced Key, End Cap, Standard Dia. Rear Seal (Red)	 -BL08 Welded Flange, Black Body, Enhanced Key, Std Dia. Rear Seal (Red)	 -CL03 Welded Flange, Grey Body, Reduced Dia. Rear Seal (Green)	 -CL06 Welded Flange, Black Body, Reduced Dia. Rear Seal (Green)
 -EC End Cap	 -G Gasket	 -GEC Gasket, End Cap	 -L009 Sealed Flange, Inside Mount	 -L012 Welded Flange, Grey Body
 -L013 Sealed Flange, Outside Mount	 -LE07 Welded Flange, End Cap	 -LE08 Welded Flange, Grey Body, Shrink Boot End Cap	 -LE12 Welded Flange, Black Body, Shrink Boot End Cap	 -LE14 Welded Flange, Black Body
 -PM01 Welded Flange, Standard Dia. Rear Seal (Red)	 -PM02 Welded Flange, Reduced Dia. Rear Seal (Green)	 -PM05 Threaded Insert, Gasket, Standard Dia. Rear Seal (Red)	 -PM06 Threaded Insert, Gasket, Reduced Dia. Rear Seal (Green)	 -PM07 Self-Threading, End Cap, Standard Dia. Rear Seal (Red)
 -PM08 Self-Threading, Standard Dia. Rear Seal (Red)	 -PM11 Self-Threading, Gasket, Standard Dia. Rear Seal (Red)	 -PM12 Self-Threading, Gasket, Reduced Dia. Rear Seal (Green)	 -PM13 Self-Threading, End Cap, Gasket, Standard Dia. Rear Seal (Red)	 -PM14 Self-Threading, End Cap, Gasket, Reduced Dia. Rear Seal (Green)
 -PM15 Self-Threading, Gasket, Strain Relief, Standard Dia. Rear Seal (Red)	 -PM16 Self-Threading, Gasket, Strain Relief, Reduced Dia. Rear Seal (Green)	 -RD Reduced Dia. Rear Seal (Green)	 -RDG Gasket, Reduced Dia. Rear Seal (Green)	










2 Position - PanelMate™ AT Receptacles and Wedgelocks

Image	Part Number	Description	Size	Amp
	AT04-2P-PM11	2 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Black Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AT04-2P-PM12	2 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Black Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AT04-2P-PM13	2 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Black Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AT04-2P-PM14	2 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Black Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AT04-2P-PM15	2 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Black Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AT04-2P-PM16	2 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Black Body (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A

2 Position - **PanelMate™ AT** Receptacles and Wedgelocks, cont.

Image	Part Number	Description	Size	Amp
	AW2P	2 Position, Receptacle Wedgelock, Green	-	-
	AW2P-A	2 Position, Receptacle Wedgelock, Keyed A, Grey	-	-
	AW2P-B	2 Position, Receptacle Wedgelock, Keyed B, Black	-	-
	AW2P-C	2 Position, Receptacle Wedgelock, Keyed C, Green	-	-
	AW2P-D	2 Position, Receptacle Wedgelock, Keyed D, Brown	-	-







3 Position - **PanelMate™ AT** Receptacles and Wedgelocks

	AT04-3P-PM05	3 Position, Receptacle with Flange, Pin, PanelMate™ AT, Threaded Insert, Gasket, Standard Diameter Rear Seal (Red), Grey Body (Requires Wedgelock AW3P. Keyed Options Available.)	16	13A
	AT04-3P-PM11	3 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Black Body (Requires Wedgelock AW3P. Keyed Options Available.)	16	13A
	AT04-3P-PM12	3 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Black Body (Requires Wedgelock AW3P. Keyed Options Available.)	16	13A
	AT04-3P-PM13	3 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Black Body (Requires Wedgelock AW3P. Keyed Options Available.)	16	13A
	AT04-3P-PM14	3 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Black Body (Requires Wedgelock AW3P. Keyed Options Available.)	16	13A
	AT04-3P-PM15	3 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Black Body (Requires Wedgelock AW3P. Keyed Options Available.)	16	13A
	AT04-3P-PM16	3 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Black Body (Requires Wedgelock AW3P. Keyed Options Available.)	16	13A
	AW3P	3 Position, Receptacle Wedgelock, Green	-	-
	AW3P-J1939	3 Position, Receptacle Wedgelock, Keyed J-1939, Blue	-	-



4 Position - **PanelMate™ AT** Receptacles and Wedgelocks

	AT04-4P-PM11	4 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Black Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-PM12	4 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Black Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-PM13	4 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Black Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-PM14	4 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Black Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-PM15	4 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Black Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A




4 Position - **PanelMate™ AT** Receptacles and Wedgelocks, cont.

Image	Part Number	Description	Size	Amp
	AT04-4P-PM16	4 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Black Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AW4P	4 Position, Receptacle Wedgelock, Green	-	-
	AW4P-A	4 Position, Receptacle Wedgelock, Keyed A, Grey	-	-
	AW4P-B	4 Position, Receptacle Wedgelock, Keyed B, Black	-	-
	AW4P-C	4 Position, Receptacle Wedgelock, Keyed C, Green	-	-
	AW4P-D	4 Position, Receptacle Wedgelock, Keyed D, Brown	-	-
















6 Position - **PanelMate™ AT** Receptacles and Wedgelocks

	AT04-6P-PM05	6 Position, Receptacle with Flange, Pin, PanelMate™ AT, Threaded Insert, Gasket, Standard Diameter Rear Seal (Red), Grey Body (Requires Wedgelock AW6P)	16	13A
	AT04-6P-PM11	6 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Black Body (Requires Wedgelock AW6P)	16	13A
	AT04-6P-PM12	6 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Black Body (Requires Wedgelock AW6P)	16	13A
	AT04-6P-PM13	6 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Black Body (Requires Wedgelock AW6P)	16	13A
	AT04-6P-PM14	6 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Black Body (Requires Wedgelock AW6P)	16	13A
	AT04-6P-PM15	6 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Black Body (Requires Wedgelock AW6P)	16	13A
	AT04-6P-PM16	6 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Black Body (Requires Wedgelock AW6P)	16	13A
	AW6P	6 Position, Receptacle Wedgelock, Green	-	-

8 Position - **PanelMate™ AT** Receptacles and Wedgelocks

	AT04-08PA-PM05	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Threaded Insert, Gasket, Standard Diameter Rear Seal (Red), Keyed A, Grey Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PA-PM11	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Keyed A, Grey Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PB-PM11	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Keyed B, Black Body (Requires Wedgelock AW8P)	16	13A

8 Position - PanelMate™ AT Receptacles and Wedgelocks, cont.

Image	Part Number	Description	Size	Amp
	AT04-08PC-PM11	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Keyed C, Green Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PD-PM11	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Keyed D, Brown Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PA-PM12	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Keyed A, Grey Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PB-PM12	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Keyed B, Black Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PC-PM12	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Keyed C, Green Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PD-PM12	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Keyed D, Brown Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PA-PM13	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Keyed A, Grey Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PB-PM13	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Keyed B, Black Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PC-PM13	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Keyed C, Green Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PD-PM13	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Keyed D, Brown Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PA-PM14	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed A, Grey Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PB-PM14	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed B, Black Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PC-PM14	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed C, Green Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PD-PM14	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed D, Brown Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PA-PM15	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Keyed A, Grey Body (Requires Wedgelock AW8P)	16	13A
















8 Position - **PanelMate™ AT** Receptacles and Wedgelocks, cont.

Image	Part Number	Description	Size	Amp
	AT04-08PB-PM15	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Keyed B, Black Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PC-PM15	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Keyed C, Green Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PD-PM15	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Keyed D, Brown Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PA-PM16	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Keyed A, Grey Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PB-PM16	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Keyed B, Black Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PC-PM16	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Keyed C, Green Body (Requires Wedgelock AW8P)	16	13A
	AT04-08PD-PM16	8 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Keyed D, Brown Body (Requires Wedgelock AW8P)	16	13A
	AW8P	8 Position, Receptacle Wedgelock, Green	-	-

12 Position - **PanelMate™ AT** Receptacles and Wedgelocks

	AT04-12PA-PM01	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Gasket, Standard Diameter Rear Seal (Red), Keyed A, Grey Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PB-PM01	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Gasket, Standard Diameter Rear Seal (Red), Keyed B, Black Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PA-PM02	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Gasket, Reduced Diameter Rear Seal (Green), Keyed A, Grey Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PB-PM02	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Gasket, Reduced Diameter Rear Seal (Green), Keyed B, Black Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PA-PM05	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Threaded Insert, Gasket, Standard Diameter Rear Seal (Red), Keyed A, Grey Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PA-PM11	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Keyed A, Grey Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PB-PM11	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Keyed B, Black Body (Requires Wedgelock AW12P)	16	13A

12 Position - PanelMate™ AT Receptacles and Wedgelocks, cont.

Image	Part Number	Description	Size	Amp
	AT04-12PC-PM11	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Keyed C, Green Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PD-PM11	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Keyed D, Brown Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PA-PM12	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Keyed A, Grey Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PB-PM12	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Keyed B, Black Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PC-PM12	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Keyed C, Green Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PD-PM12	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Keyed D, Brown Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PA-PM13	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Keyed A, Grey Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PB-PM13	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Keyed B, Black Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PC-PM13	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Keyed C, Green Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PD-PM13	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Keyed D, Brown Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PA-PM14	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed A, Grey Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PB-PM14	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed B, Black Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PC-PM14	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed C, Green Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PD-PM14	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed D, Brown Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PA-PM15	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Keyed A, Grey Body (Requires Wedgelock AW12P)	16	13A




12 Position - PanelMate™ AT Receptacles and Wedgelocks, cont.

Image	Part Number	Description	Size	Amp
	AT04-12PB-PM15	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Keyed B, Black Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PC-PM15	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Keyed C, Green Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PD-PM15	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Keyed D, Brown Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PA-PM16	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Keyed A, Grey Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PB-PM16	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Keyed B, Black Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PC-PM16	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Keyed C, Green Body (Requires Wedgelock AW12P)	16	13A
	AT04-12PD-PM16	12 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Keyed D, Brown Body (Requires Wedgelock AW12P)	16	13A
	AW12P	12 Position, Receptacle Wedgelock, Green	-	-







13 Position - PanelMate™ AT Receptacles

	AT1612-13PB	13 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, No Gasket, End Cap, Standard Diameter Rear Seal (Red), Keyed B, Black Body (No Add'l Wedgelock Required)	12-16	13-25A
	AT1612-13PB-G	13 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Keyed B, Black Body (No Add'l Wedgelock Required)	12-16	13-25A
	AT1612-13PB-RD	13 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, No Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed B, Black Body (No Add'l Wedgelock Required)	12-16	13-25A
	AT1612-13PB-RDG	13 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed B, Black Body (No Add'l Wedgelock Required)	12-16	13-25A

2, 3, 4, 6, 8, 12 and 13 Position - PanelMate™ AT Gaskets

	AT04-XP-PM1X-G7	Gasket for 2, 3, 4, 6 Position, PanelMate™ AT Receptacles	-	-
	AT04-08PB-G7	Gasket for 8 Position, PanelMate™ AT Receptacle	-	-
	AT1612-PB-G7	Gasket for 12 & 13 Position, PanelMate™ AT Receptacle	-	-







18 Position - PanelMate™ AT Receptacles

Image	Part Number	Description	Size	Amp
	AT16-18PA-PM11	18 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed A, Grey Body (No Add'l Wedgelock Required)	16	13A
	AT16-18PB-PM11	18 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed B, Black Body (No Add'l Wedgelock Required)	16	13A
	AT16-18PC-PM11	18 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed C, Green Body (No Add'l Wedgelock Required)	16	13A
	AT16-18PD-PM11	18 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed D, Brown Body (No Add'l Wedgelock Required)	16	13A
	AT16-18PE-PM11	18 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Keyed E, Grey Body (No Add'l Wedgelock Required)	16	13A
	AT16-18PA-PM15	18 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Keyed A, Grey Body (No Add'l Wedgelock Required)	16	13A
	AT16-18PB-PM15	18 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Keyed B, Black Body (No Add'l Wedgelock Required)	16	13A
	AT16-18PC-PM15	18 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Keyed C, Green Body (No Add'l Wedgelock Required)	16	13A
	AT16-18PD-PM15	18 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Keyed D, Brown Body (No Add'l Wedgelock Required)	16	13A
	AT16-18PE-PM15	18 Position, Receptacle with Flange, Pin, PanelMate™ AT, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Keyed E, Grey Body (No Add'l Wedgelock Required)	16	13A









2 Position - PanelMate™ AT 4 Hole Welded Flange Receptacles and Wedgelocks

	AT04-2P-L012	2 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Grey (Requires Wedgelock AW2P. Keyed Options Available.)	16	13A
	AW2P	2 Position, Receptacle Wedgelock, Green	-	-
	AW2P-A	2 Position, Receptacle Wedgelock, Grey	-	-
	AW2P-B	2 Position, Receptacle Wedgelock, Black	-	-
	AW2P-C	2 Position, Receptacle Wedgelock, Green	-	-
	AW2P-D	2 Position, Receptacle Wedgelock, Brown	-	-




3 Position - PanelMate™ AT 4 Hole Welded Flange Receptacles and Wedgelocks

Image	Part Number	Description	Size	Amp
	AT04-3P-L012	3 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Grey Body (Requires Wedgelock AW3P. Keyed Options Available.)	16	13A
	AT04-3P-LE08	3 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Shrink Boot End Cap, Grey Body (Requires Wedgelock AW3P. Keyed Options Available.)	16	13A
	AT04-3P-LE12	3 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Shrink Boot End Cap, Black Body (Requires Wedgelock AW3P. Keyed Options Available.)	16	13A
	AT04-3P-CL03	3 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Reduced Diameter Rear Seal (Green), Grey Body (Requires Wedgelock AW3P. Keyed Options Available.)	16	13A
	AT04-3P-CL06	3 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Reduced Diameter Rear Seal (Green), Black Body (Requires Wedgelock AW3P. Keyed Options Available.)	16	13A
	AW3P	3 Position, Receptacle Wedgelock, Green	-	-
	AW3P-J1939	3 Position, Receptacle Wedgelock, Keyed J-1939, Blue	-	-

4 Position - PanelMate™ AT 4 Hole Welded Flange Receptacles and Wedgelocks

	AT04-4P-L012	4 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Grey Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-LE11	4 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), End Cap, Black Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-CL03	4 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Reduced Diameter Rear Seal (Green), Grey Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AT04-4P-CL06	4 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Reduced Diameter Rear Seal (Green), Black Body (Requires Wedgelock AW4P. Keyed Options Available.)	16	13A
	AW4P	4 Position, Receptacle Wedgelock, Green	-	-
	AW4P-A	4 Position, Receptacle Wedgelock, Keyed A, Grey	-	-
	AW4P-B	4 Position, Receptacle Wedgelock, Keyed B, Black	-	-
	AW4P-C	4 Position, Receptacle Wedgelock, Keyed C, Green	-	-
	AW4P-D	4 Position, Receptacle Wedgelock, Keyed D, Brown	-	-












6 Position - **PanelMate™ AT 4 Hole Welded Flange** Receptacles and Wedgelocks

Image	Part Number	Description	Size	Amp
	AT04-6P-L012	6 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Grey Body (Requires Wedgelock AW6P.)	16	13A
	AT04-6P-CL06	6 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Reduced Diameter Seal, Black Body (Requires Wedgelock AW6P.)	16	13A
	AW6P	6 Position, Receptacle Wedgelock, Green	-	-












8 Position - **PanelMate™ AT 4 Hole Welded Flange** Receptacles and Wedgelocks

	AT04-08PA-CL03	8 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Reduced Diameter Seal, Keyed A, Grey Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PA-CL06	8 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Reduced Diameter Seal, Keyed A, Black Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PA-L012	8 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed A, Grey Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PB-L012	8 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed B, Black Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PC-L012	8 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed C, Green Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PD-L012	8 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed D, Brown Body (Requires Wedgelock AW8P.)	16	13A
	AT04-08PA-LE11	8 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed A, End Cap, Black Body (Requires Wedgelock AW8P.)	16	13A
	AW8P	8 Position, Receptacle Wedgelock, Green	-	-



12 Position - PanelMate™ AT 4 Hole Welded Flange Receptacles and Wedgelocks

Image	Part Number	Description	Size	Amp
	AT04-12PA-L012	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed A, Grey Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PB-L012	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed B, Black Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PC-L012	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed C, Green Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PD-L012	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed D, Brown Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PA-LE07	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), End Cap, Keyed A, Grey Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PB-LE07	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), End Cap, Keyed B, Black Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PC-LE07	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), End Cap, Keyed C, Green Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PD-LE07	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), End Cap, Keyed D, Brown Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PA-LE14	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed A, Black Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PA-BL04	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed A, Enhanced Key, Grey Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PB-BL04	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed B, Enhanced Key, Black Body (Requires Wedgelock AW12P.)	16	13A



12 Position - PanelMate™ AT 4 Hole Welded Flange Receptacles and Wedgelocks, cont.

Image	Part Number	Description	Size	Amp
	AT04-12PC-BL04	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed C, Enhanced Key, Green Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PD-BL04	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed D, Enhanced Key, Brown Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PA-BL05	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed A, Enhanced Key, End Cap, Grey Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PB-BL05	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed B, Enhanced Key, End Cap, Black Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PC-BL05	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed C, Enhanced Key, End Cap, Green Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PD-BL05	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed D, Enhanced Key, End Cap, Brown Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PA-BL08	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Standard Diameter Rear Seal (Red), Keyed A, Enhanced Key, Black Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PA-CL03	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Reduced Diameter Rear Seal (Green), Keyed A, Grey Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PB-CL03	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Reduced Diameter Rear Seal (Green), Keyed B, Black Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PC-CL03	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Reduced Diameter Rear Seal (Green), Keyed C, Green Body (Requires Wedgelock AW12P.)	16	13A
	AT04-12PD-CL03	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Reduced Diameter Rear Seal (Green), Keyed D, Brown Body (Requires Wedgelock AW12P.)	16	13A

12 Position - **PanelMate™ AT 4 Hole Welded Flange** Receptacles and Wedgelocks, cont.

Image	Part Number	Description	Size	Amp
	AT04-12PA-CL06	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ AT, Reduced Diameter Rear Seal (Green), Keyed A, Black Body (Requires Wedgelock AW12P.)	16	13A
	AW12P	12 Position, Receptacle Wedgelock, Green	-	-










3, 4, 8 and 12 Position - **PanelMate™ AT 4 Hole Welded Flange** Receptacle Gaskets

	AT3P-L012-GKT	Gasket for 3 Position Receptacle with 4 Hole Welded Flange, PanelMate™ AT, Closed Cell Sponge Rubber	-	-
	AT4P-L012-GKT	Gasket for 4 Position Receptacle with 4 Hole Welded Flange, PanelMate™ AT, Closed Cell Sponge Rubber	-	-
	AT8P-L012-GKT	Gasket for 8 Position Receptacle with 4 Hole Welded Flange, PanelMate™ AT, Closed Cell Sponge Rubber	-	-
	AT12-L012-GKT	Gasket for 12 Position Receptacle with 4 Hole Welded Flange, PanelMate™ AT, Closed Cell Sponge Rubber	-	-

12 Position - **PanelMate™ ATM 4 Hole Welded Flange** Receptacle and Wedgelocks

	ATM04-12PA-PM01	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ ATM, Standard Diameter Rear Seal (Red), Keyed A (Grey Insert), Grey Body (Requires Wedgelock AWM-12P)	20	7.5A
	ATM04-12PB-PM01	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ ATM, Standard Diameter Rear Seal (Red), Keyed B (Black Insert), Grey Body (Requires Wedgelock AWM-12P)	20	7.5A
	ATM04-12PC-PM01	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ ATM, Standard Diameter Rear Seal (Red), Keyed C (Green Insert), Grey Body (Requires Wedgelock AWM-12P)	20	7.5A
	ATM04-12PD-PM01	12 Position, Receptacle with 4 Hole Welded Flange, Pin, PanelMate™ ATM, Standard Diameter Rear Seal (Red), Keyed D (Brown Insert), Grey Body (Requires Wedgelock AWM-12P)	20	7.5A
	AWM-12P	12 Position, Receptacle Wedgelock, Green	-	-



2 Position - **PanelMate™ ATP** Receptacles and Wedgelocks

Image	Part Number	Description	Size	Amp
	ATP04-2P-PM07G	2 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Black Body (Requires Wedgelock AWP-2P. Keyed Options Available.)	12	25A
	ATP04-2P-PM07GEC	2 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Black Body (Requires Wedgelock AWP-2P. Keyed Options Available.)	12	25A
	ATP04-2P-PM08G	2 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Grey Body (Requires Wedgelock AWP-2P. Keyed Options Available.)	12	25A
	ATP04-2P-PM08GEC	2 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Grey Body (Requires Wedgelock AWP-2P. Keyed Options Available.)	12	25A
	AWP-2P	2 Position, Receptacle Wedgelock, Orange	-	-
	AWP-2PA	2 Position, Receptacle Wedgelock, Keyed A, Grey	-	-
	AWP-2PB	2 Position, Receptacle Wedgelock, Keyed B, Black	-	-
	AWP-2PC	2 Position, Receptacle Wedgelock, Keyed C, Green	-	-
	AWP-2PD	2 Position, Receptacle Wedgelock, Keyed D, Brown	-	-














4 Position - **PanelMate™ ATP** Receptacles and Wedgelocks

	ATP04-4P-PM01	4 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Standard Diameter Rear Seal (Red), Grey Body (Requires Wedgelock AWP-4P. Keyed Options Available.)	12	25A
	ATP04-4P-PM02	4 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Standard Diameter Rear Seal (Red), End Cap, Grey Body (Requires Wedgelock AWP-4P. Keyed Options Available.)	12	25A
	ATP04-4P-PM07G	4 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Black Body (Requires Wedgelock AWP-4P. Keyed Options Available.)	12	25A
	ATP04-4P-PM07GEC	4 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Black Body (Requires Wedgelock AWP-4P. Keyed Options Available.)	12	25A
	ATP04-4P-PM08G	4 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Grey Body (Requires Wedgelock AWP-4P. Keyed Options Available.)	12	25A
	ATP04-4P-PM08GEC	4 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), End Cap, Grey Body (Requires Wedgelock AWP-4P. Keyed Options Available.)	12	25A
	AWP-4P	4 Position, Receptacle Wedgelock, Orange	-	-
	AWP-4PA	4 Position, Receptacle Wedgelock, Keyed A, Grey	-	-
	AWP-4PB	4 Position, Receptacle Wedgelock, Keyed B, Black	-	-
	AWP-4PC	4 Position, Receptacle Wedgelock, Keyed C, Green	-	-















6 Position - PanelMate™ ATP Receptacles and Wedgelocks

Image	Part Number	Description	Size	Amp
	AWP-4PD	4 Position, Receptacle Wedgelock, Keyed D, Brown	-	-
	ATP4P-L012-GKT	Gasket For 4 Position Receptacle with Flange, Panelmate™ ATP (Use with ATP04-4P-PM01/PM02)	-	-


6 Position - PanelMate™ ATP Receptacles and Wedgelocks

	ATP04-6P-PM05	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Threaded Insert, Gasket, Standard Diameter Rear Seal (Red), Grey Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM05BK	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Threaded Insert, Gasket, Standard Diameter Rear Seal (Red), Black Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM05EC	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Threaded Insert, Gasket, Standard Diameter Rear Seal (Red), End Cap, Grey Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM05ECBK	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Threaded Insert, Gasket, Standard Diameter Rear Seal (Red), End Cap, Black Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM05SR	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Threaded Insert, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Grey Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM05SRBK	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Threaded Insert, Gasket, Standard Diameter Rear Seal (Red), Strain Relief, Black Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM06	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Threaded Insert, Gasket, Reduced Diameter Rear Seal (Green), Grey Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM06BK	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Threaded Insert, Gasket, Reduced Diameter Rear Seal (Green), Black Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM06EC	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Threaded Insert, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Grey Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM06ECBK	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Threaded Insert, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Black Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM06SR	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Threaded Insert, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Grey Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM06SRBK	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Threaded Insert, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Black Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM11	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Grey Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A






6 Position - **PanelMate™ ATP** Receptacles and Wedgelocks, cont.

Image	Part Number	Description	Size	Amp
	ATP04-6P-PM11BK	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Black Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM12	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Grey Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM12BK	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Black Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM13	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, End Cap, Grey Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM13BK	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, End Cap, Black Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM14	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Grey Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM14BK	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), End Cap, Black Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM15	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Strain Relief, Grey Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM15BK	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Strain Relief, Black Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM16	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Grey Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	ATP04-6P-PM16BK	6 Position, Receptacle with Flange, Pin, PanelMate™ ATP, Self-Threading, Gasket, Reduced Diameter Rear Seal (Green), Strain Relief, Black Body (Requires Wedgelock AWP-6P. Keyed Options Available.)	12	25A
	AWP-6P	6 Position, Receptacle Wedgelock, Orange	-	-
	AWP-6PA	6 Position, Receptacle Wedgelock, Keyed A, Grey	-	-
	AWP-6PB	6 Position, Receptacle Wedgelock, Keyed B, Black	-	-

Single Position - **PanelMate™ ATHD** Receptacles

	ATHD04-1-4P-L009	Single Position, Receptacle with Inside Mount Sealed Flange, Pin, Size 4, PanelMate™ ATHD, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Black Body	4	100A
-------------------------------------------------------------------------------------	------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------	---	------

Single Position - PanelMate™ ATHD Receptacles, cont.

Image	Part Number	Description	Size	Amp
	ATHD04-1-4P-L013	Single Position, Receptacle with Outside Mount Sealed Flange, Pin, Size 4, PanelMate™ ATHD, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Black Body	4	100A
	ATHD04-1-8P-PM05	Single Position, Receptacle with Flange, Pin, Size 8, PanelMate™ ATHD, Threaded Insert, Gasket, Standard Diameter Rear Seal (Red), Black Body	8	60A
	ATHD04-1-8P-PM11	Single Position, Receptacle with Flange, Pin, Size 8, PanelMate™ ATHD, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Black Body	8	60A
	ATHD04-1-12P-PM05	Single Position, Receptacle with Flange, Pin, Size 12, PanelMate™ ATHD, Threaded Insert, Gasket, Standard Diameter Rear Seal (Red), Black Body	12	25A
	ATHD04-1-12P-PM11	Single Position, Receptacle with Flange, Pin, Size 12, PanelMate™ ATHD, Self-Threading, Gasket, Standard Diameter Rear Seal (Red), Black Body	12	25A

For more information, contact: Customer Service, +1 800 394 7732, csr@amphenol-sine.com

© 2018 Amphenol Sine Systems Corporation, 44274 Morley Drive, Clinton Township MI 48036 USA. www.amphenol-sine.com. Customer Service +1 800 394 7732
Every effort has been made to ensure that the information contained in this document is accurate at the time of publication. Specifications or information stated in this document are subject to change without notice.