

Article No. : 6SL3220-3YE56-0CP0



Figure similar

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

### Rated data

#### Input

|                      |                           |                 |
|----------------------|---------------------------|-----------------|
| Number of phases     | 3 AC                      |                 |
| Line voltage         | 380 ... 480 V +10 % -10 % |                 |
| Line frequency       | 47 ... 63 Hz              |                 |
| <b>Rated voltage</b> | <b>400V IEC</b>           | <b>480V NEC</b> |
| Rated current (LO)   | 585.00 A                  | 486.00 A        |
| Rated current (HO)   | 477.00 A                  | 397.00 A        |

#### Output

|                      |                 |                               |
|----------------------|-----------------|-------------------------------|
| Number of phases     | 3 AC            |                               |
| <b>Rated voltage</b> | <b>400V IEC</b> | <b>480V NEC <sup>1)</sup></b> |
| Rated power (LO)     | 315.00 kW       | 400.00 hp                     |
| Rated power (HO)     | 250.00 kW       | 300.00 hp                     |
| Rated current (LO)   | 570.00 A        | 477.00 A                      |
| Rated current (HO)   | 477.00 A        | 390.00 A                      |
| Rated current (IN)   | 585.00 A        |                               |
| Max. output current  | 770.00 A        |                               |

|                                     |              |  |
|-------------------------------------|--------------|--|
| Pulse frequency                     | 4 kHz        |  |
| Output frequency for vector control | 0 ... 100 Hz |  |
| Output frequency for V/f control    | 0 ... 100 Hz |  |

#### Overload capability

|                    |  |  |
|--------------------|--|--|
| Low Overload (LO)  | 110% base load current IL for 60 s in a 300 s cycle time       |  |
| High Overload (HO) | 150% x base load current IH for 60 s within a 600 s cycle time |  |

### General tech. specifications

|                                   |  |
|-----------------------------------|--|
| Power factor $\lambda$            | 0.75 ... 0.93                          |
| Offset factor $\cos \phi$         | 0.96                                   |
| Efficiency $\eta$                 | 0.98                                   |
| Sound pressure level (1m)         | 74 dB                                  |
| Power loss <sup>3)</sup>          | 6.830 kW                               |
| Filter class (integrated)         | RFI suppression filter for Category C3 |
| EMC category (with accessories)   | Category C3                            |
| Safety function "Safe Torque Off" | without                                |

### Communication

|               |             |
|---------------|-------------|
| Communication | PROFIBUS DP |
|---------------|-------------|

### Inputs / outputs

#### Standard digital inputs

|                        |       |
|------------------------|-------|
| Number                 | 6     |
| Switching level: 0 → 1 | 11 V  |
| Switching level: 1 → 0 | 5 V   |
| Max. inrush current    | 15 mA |

#### Fail-safe digital inputs

|        |   |
|--------|---|
| Number | 1 |
|--------|---|

#### Digital outputs

|                                    |                |
|------------------------------------|----------------|
| Number as relay changeover contact | 2              |
| Output (resistive load)            | DC 30 V, 5.0 A |
| Number as transistor               | 0              |

#### Analog / digital inputs

|            |                        |
|------------|------------------------|
| Number     | 2 (Differential input) |
| Resolution | 10 bit                 |

#### Switching threshold as digital input

|       |       |
|-------|-------|
| 0 → 1 | 4 V   |
| 1 → 0 | 1.6 V |

#### Analog outputs

|        |                         |
|--------|-------------------------|
| Number | 1 (Non-isolated output) |
|--------|-------------------------|

#### PTC/ KTY interface

|  |  |
|--|--|
| 1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy $\pm 5$ °C |  |
|--|--|

### Closed-loop control techniques

|   |     |
|---|-----|
| V/f linear / square-law / parameterizable | Yes |
| V/f with flux current control (FCC)       | Yes |
| V/f ECO linear / square-law               | Yes |
| Sensorless vector control                 | Yes |
| Vector control, with sensor               | No  |
| Encoderless torque control                | No  |
| Torque control, with encoder              | No  |

## Data sheet for SINAMICS G120X


Article No. : 6SL3220-3YE56-0CP0

| Ambient conditions          |  |
|-----------------------------|--|
| Standard board coating type | Class 3C2, according to IEC 60721-3-3: 2002                    |
| Cooling                     | Air cooling using an integrated fan                            |
| Cooling air requirement     | 0.362 m <sup>3</sup> /s (12.784 ft <sup>3</sup> /s)            |
| Installation altitude       | 1,000 m (3,280.84 ft)  |
| Ambient temperature         |  |
| Operation                   | 0 ... 45 °C (32 ... 113 °F)                                    |
| Transport                   | -40 ... 70 °C (-40 ... 158 °F)                                 |
| Storage                     | -25 ... 55 °C (-13 ... 131 °F)                                 |
| Relative humidity           |  |
| Max. operation              | 95 % At 40 °C (104 °F), condensation and icing not permissible |

| Connections                    |   |
|--------------------------------|---|
| Signal cable                   |   |
| Conductor cross-section        | 0.15 ... 1.50 mm <sup>2</sup><br>(AWG 24 ... AWG 16)        |
| Line side                      |   |
| Version                        | M12 screw   |
| Conductor cross-section        | 4 x 240.00 mm <sup>2</sup><br>(MCM 2 x 500 ... MCM 4 x 500) |
| Motor end                      |   |
| Version                        | M12 screw   |
| Conductor cross-section        | 4 x 240.00 mm <sup>2</sup><br>(MCM 2 x 500 ... MCM 4 x 500) |
| DC link (for braking resistor) |   |
| PE connection                  | M12 screw   |
| Max. motor cable length        |   |
| Shielded                       | 150 m (492.13 ft)   |

| Mechanical data           |   |
|---------------------------|---|
| Degree of protection      | IP20 / UL open type   |
| Frame size                | FSH   |
| Net weight                | 151 kg (332.90 lb)  |
| Dimensions                |   |
| Width                     | 548 mm (21.57 in)   |
| Height                    | 1,695 mm (66.73 in)   |
| Depth                     | 393 mm (15.47 in)   |
| Standards                 |   |
| Compliance with standards | UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH        |
| CE marking                | EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC |

| Converter losses to IEC61800-9-2*                    |        |
|--|--------|
| Efficiency class                                     | IE2    |
| Comparison with the reference converter (90% / 100%) | 41.2 % |

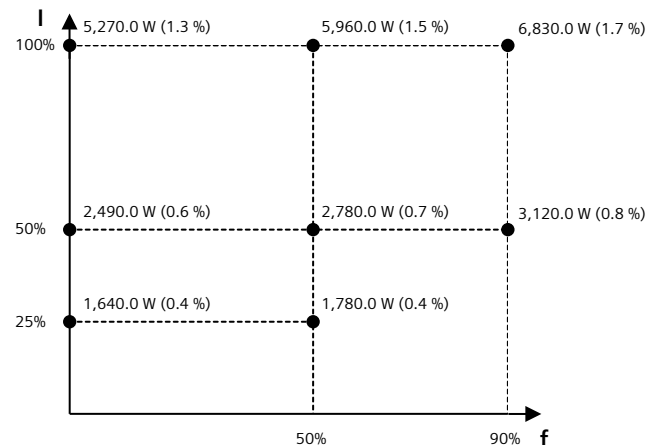

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*converted values

<sup>1)</sup>The output current and HP ratings are valid for the voltage range 440V-480V

<sup>3)</sup>Typical value. More information can be found in the element group "Converter losses to IEC 61800-9-2" in this datasheet.

## Data sheet for SINAMICS G120X

Article No. : 6SL3220-3YE56-0CP0

### Operator panel: Intelligent Operator Panel (IOP-2)

#### Screen

|                   |                 |
|-------------------|-----------------|
| Display design    | LCD color       |
| Screen resolution | 320 x 240 Pixel |

#### Mechanical data

|                      |                    |
|----------------------|--------------------|
| Degree of protection | IP55 / UL type 12  |
| Net weight           | 0.134 kg (0.30 lb) |

#### Dimensions

|        |                     |
|--------|---------------------|
| Width  | 70.00 mm (2.76 in)  |
| Height | 106.85 mm (4.21 in) |
| Depth  | 19.65 mm (0.77 in)  |

#### Ambient conditions

##### Ambient temperature

|           |  |
|-----------|--|
| Operation | 0 ... 50 °C (32 ... 122 °F)<br>55 °C only with door installation kit |
|-----------|--|

|         |                                |
|---------|--------------------------------|
| Storage | -40 ... 70 °C (-40 ... 158 °F) |
|---------|--------------------------------|

|           |                                |
|-----------|--------------------------------|
| Transport | -40 ... 70 °C (-40 ... 158 °F) |
|-----------|--------------------------------|

##### Relative humidity at 25°C during

|                |      |
|----------------|------|
| Max. operation | 95 % |
|----------------|------|

#### Approvals

|                            |                          |
|----------------------------|--------------------------|
| Certificate of suitability | CE, cULus, EAC, KCC, RCM |
|----------------------------|--------------------------|