

## 17030.6 TKS 4/SI 5x20 GR



Transformer-fused terminal, Screw connection, Mounting type: Custom profile, Rated cross-section: 4 mm<sup>2</sup>, Width: 12.5 mm, Colour: Grey

**RAL:** 7030

### Business data

Article number	<u>17030.6</u>
Article name	TKS 4/SI 5x20 GR
GTIN (EAN)	4044211149413
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	11.36 g
Weight per piece (including packaging)	11.76 g
Unit of weight	G
Customs number	85369010
Country of origin	CZ
Prio-Article	17030.3
Product description	Transformer-fused terminal

### Technical data

#### Dimensions

Length	28.3 mm
Width	12.5 mm
Height	43.9 mm

#### Ratings

Rated voltage	250 V
Rated current	32 A
Rated cross-section	4 mm <sup>2</sup>
Rated impulse voltage	4 kV
Overvoltage category	III
Contamination degree	3

#### Connection data

Connection principle	Screw connection
Connections	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	6 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	6 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	4 mm <sup>2</sup>
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	10
Stripping length	8 mm
Screw head	Slotted
Screw threading	M 3
Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm

#### Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

---

### Technical data

---

#### Further technical data

Mounting type	Custom profile
Fuse size	5 x 20 mm
Gauge plug acc. to EN 60 947-1	A4
Power loss in singular arrangement - overload and short-circuit protection, max.	2,5 / 6,3 W / A
Power loss in compound arrangement - overload and short-circuit protection, max.	2,5 / 6,3 W / A
Power loss in singular arrangement - only short-circuit protection, max.	4 / 10 W / A
Power loss in compound arrangement - only short-circuit protection, max.	4 / 8 W / A

#### Environmental Product Compliance

REACH Conform	yes
REACH Candidate Substance Note	No
RoHS Conform	yes

### Approvals

#### Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	yes
----------------------	-----

#### CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	yes
----------------------	-----

CSA Usegroup B: rated voltage	600 (300) V
-------------------------------	-------------

CSA Usegroup B: rated current	10 A
-------------------------------	------

CSA Usegroup C: rated voltage	600 (300) V
-------------------------------	-------------

CSA Usegroup C: rated current	10 A
-------------------------------	------

CSA wire cross-section AWG, min.	22
----------------------------------	----

CSA wire cross-section AWG, max.	10
----------------------------------	----

CSA torque, max.	1 Nm
------------------	------

CSA torque, min.	0.5 Nm
------------------	--------

#### CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	yes
------------------------	-----

CSAus Usegroup B: rated voltage	600 (300) V
---------------------------------	-------------

CSAus Usegroup B: rated current	10 A
---------------------------------	------

CSAus Usegroup C: rated voltage	600 (300) V
---------------------------------	-------------

CSAus Usegroup C: rated current	10 A
---------------------------------	------

CSAus wire cross-section AWG, min.	22
------------------------------------	----

CSAus wire cross-section AWG, max.	10
------------------------------------	----

CSAus torque, min.	0.5 Nm
--------------------	--------

CSAus torque, max.	1 Nm
--------------------	------

### Approvals

#### KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-3:2009
KEMA KEUR approval granted	yes
KEMA rated voltage	250 V
KEMA rated current	10 A
KEMA rated impulse voltage (fuse holder without electrical components)	8 (4) kV
KEMA wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
KEMA wire cross-section single-core (rigid), max.	6 mm <sup>2</sup>
KEMA wire cross-section stranded, min.	0.2 mm <sup>2</sup>
KEMA wire cross-section stranded, max.	6 mm <sup>2</sup>
KEMA torque, min.	0.5 Nm
KEMA torque, max.	1 Nm
KEMA fuse size	5 x 20 mm
KEMA power loss in singular arrangement - overload and short-circuit protection, max.	2,5 / 6,3 W / A
KEMA power loss in compound arrangement - overload and short-circuit protection, max.	2,5 / 6,3 W / A
KEMA power loss in singular arrangement - only short-circuit protection, max.	4 / 10 W / A
KEMA power loss in compound arrangement - only short-circuit protection, max.	4 / 8 W / A




#### UL Recognized

UL approval	UL 1059
UL Usegroup B: rated voltage	600 V
UL Usegroup B: rated current	30 A
UL Usegroup C: rated voltage	600 V
UL Usegroup C: rated current	30 A
UL wire cross-section single-core (rigid) AWG, min.	24
UL wire cross-section single-core (rigid) AWG, max.	10
UL wire cross-section stranded AWG, min.	24
UL wire cross-section stranded AWG, max.	10
UL torque, min.	4.4 Lb In.
UL torque, max.	8.85 Lb In.
UL wire material	Cu
UL factory wiring	1
UL field wiring	1
UL Recognized	1

### Media

EAC

M3

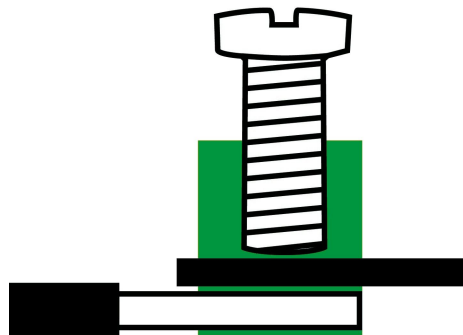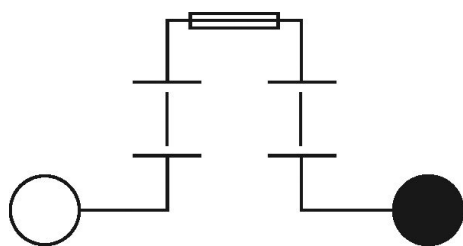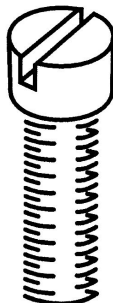

### Accessories

#### Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 7.5 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
<u>9326.7</u>	PMC SB 7,5/40 WH	4044211157784	400 ST



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 7.5 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3327.7</u>	PMC SB 7,5/40 So WH	4044211128845	400 ST

#### Screwdriver



Screwdriver with bare blade, Colour: Black-grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1086.0</u>	SDB 0,6x3,5	4044211014797	1 ST