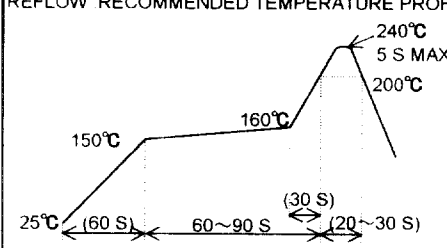


May.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△					△					
△					△					
<b>APPLICATION STANDARD</b>										
<b>RATING</b>	OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C			STORAGE TEMPERATURE RANGE	-10 °C TO 60 °C				
	VOLTAGE	AC 50 V			OPERATING HUMIDITY RANGE	RELATIVE HUMIDITY : 95 % MAX (NO DEW CONDENSATION IS PERMITTED)				
	CURRENT	0.3 A								
<b>SPECIFICATIONS</b>										
<b>ITEM</b>	<b>TEST METHOD</b>				<b>REQUIREMENT</b>				<b>QT</b>	<b>AT</b>
<b>CONSTRUCTION</b>										
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.			ACCORDING TO DRAWING			X	X	
MARKING		CONFIRMED VISUALLY.						X	X	
<b>ELECTRICAL CHARACTERISTICS</b>										
CONTACT RESISTANCE		100 mA (DC OR 1000 Hz).			60 mΩ MAX.			X	X	
INSULATION RESISTANCE		100 V DC.			100 MΩ MIN.			X	-	
VOLTAGE PROOF		150 V AC FOR 1 min.			NO FLASHOVER OR BREAKDOWN.			X	X	
<b>MECHANICAL CHARACTERISTICS</b>										
INSERTION AND WITHDRAWAL FORCES		MEASURED BY APPLICABLE CONNECTOR.			INSERTION FORCE: 55.2 N MAX. WITHDRAWAL FORCE: 2.3 N MIN.			X	-	
MECHANICAL OPERATION		50 TIMES INSERTION AND EXTRACTIONS.			1)CONTACT RESISTANCE: 70 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.			X	-	
VIBRATION		FREQUENCY: 10 TO 55 Hz, SINGLE AMPLITUDE: 0.75 mm, - m/s <sup>2</sup> AT 10 CYCLES FOR 3 DIRECTIONS.			1)NO ELECTRICAL DISCONTINUITY OF 1 μs MIN. 2)NO DAMAGE, CRACK AND LOOSENESS OF PART.			X	-	
SHOCK		490 m/s <sup>2</sup> DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.						X	-	
<b>ENVIRONMENTAL CHARACTERISTICS</b>										
DAMP HEAT (STEADY STATE)		EXPOSED AT 40±2 °C, 90~95 %, 96 h.			1)CONTACT RESISTANCE: 70 mΩ MAX. 2)INSULATION RESISTANCE: 100 MΩ MIN.			X	-	
RAPID CHAGE OF TEMPERTURE		TEMPERTURE -55→15~35→ 85→15~35°C TIME 30→ 2~ 3→ 30→ 2~ 3 min. UNDER 5 CYCLES.			3)NO DAMAGE, CRACK AND LOOSENESS OF PART.			X	-	
DRY HEAT		EXPOSED AT 85 °C, 96 h.			1)CONTACT RESISTANCE: 70 mΩ MAX.			X	-	
COLD		EXPOSED AT -55 °C, 96 h.			2)NO DAMAGE, CRACK AND LOOSENESS OF PART.			X	-	
CORROSION SALT MIST		EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.			NO HEAVY CORROSION.			X	-	
SULPHUR DIOXIDE		EXPOSED IN 10 PPM FOR 96 h. (TEST STANDARD:JIS C 0090)			1)CONTACT RESISTANCE: 70 mΩ MAX. 2)NO HEAVY CORROSION.			X	-	
RESISTANCE TO SOLDERING HEAT		REFLOW RECOMMENDED TEMPERATURE PROFILE  TO BE TESTED UNDER THE ABOVE CONDITIONS.			NO MELTING OF RESIN WHICH AFFECTS THE PERFORMANCE OF COMPONENT.			X	-	
SOLDRABILITY		SOLDERED AT SOLDER TEMPERATURE, 235 °C FOR IMMERSION DURATION, 2 s.			NO PINHOLE OR DEWETTING ON SOLDERED SURFACE.			X	-	
REMARKS				DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED		
				<i>Mitsukawa</i>	<i>Mitsukawa</i>	<i>M. Sakaki</i>	<i>T. Yoshimura</i>			
UNLESS OTERWISE SPECIFIED, REFER TO JIS C 5402.				99.10.25	99.10.25	99.10.26	99.10.26			
NOTE QT: QUALIFICATION TEST AT: ASSURANCE TEST X: APPLICABLE TEST										
<b>HRS</b> HIROSE ELECTRIC CO.,LTD.				<b>SPECIFICATION SHEET</b>			PART NO. <b>FX11LB -92 S - SV (21)</b>			
CODE NO.(OLD)		DRAWING NO.			CODE NO.			1		
CL		ELC4 - 152121 - 01			CL 573 - 0153 - 2 - 21			1		

TO  
PCK